

SASSO PRO 100

adjustable offset trim square

048-2412638W 052-1952418



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL 9005 ¹	
Mounting set jet black	
IP20	
2210 lm	

LED

4000 K	
CRI ≥ 90	
L80 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 97 , R _r : 89 , R ₍₁₋₁₅₎ : 91	
MR 0.85	
MDER 0.77	

Optical

wide flood	
beam angle 57°	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 27.0 W	
system 82 lm/W ³	
PC2	
1 DALI Addr.	


Physical

trim	
length 112 mm	
width 112 mm	
height 106 mm	
0.59 kg	


Cutout

diameter 108 mm	
min. ceiling thickness 5 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	

Light distribution



Product drawing

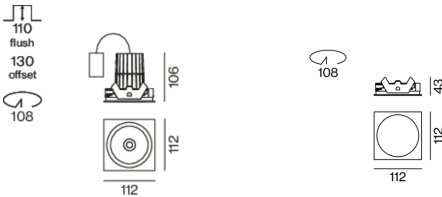

[*048-2412638W 052-1952418*] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com