

# SASSO PRO 100

## adjustable

trimless exposed concrete  
048-2410637W 052-1913410



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL 9016 <sup>1</sup>

IP20

1420 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 89 , R<sub>f(1-15)</sub>: 91

MR 0.85

MDER 0.77

### Optical

wide flood

beam angle 57°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 14.7 W

system 97 lm/W<sup>3</sup>

PC2

1 DALI Addr.

### Physical

trimless for exposed concrete ceiling

length 229 mm


width 227 mm

height 160 mm


0.75 kg

Round recessed spotlight in die-cast aluminium; surface white powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 57° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

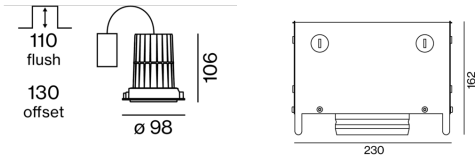

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses  
& operating device efficiency

### Installation instructions



### Lighting calculator



# SASSO PRO 100

## adjustable

trimless exposed concrete

048-2410637W 052-1913410



Project / Type

Notes

Count / Date

### Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.99                         | 0.96   | 0.93              | 0.9                             | 0.88   |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Factor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

### Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 18                 |
| B16                            | 30                 |
| C10                            | 23                 |
| C16                            | 36                 |

### Components

#### EXPOSED CONCRETE MOUNTING HOUSING

L-W-H (MM)  
229-227-160

ARTICLE NUMBER(S)  
052-1913410



### Mounting accessories

#### THROUGH WIRING CONNECTION BOX

TYPE  
non DIM cable ø 4 – 12 mm, Linect®-Ready  
DALI cable ø 4 – 12 mm, Linect®-Ready

L-W-H (MM)  
105-58-30  
105-58-30

ARTICLE NUMBER(S)  
005-2531110  
005-2551110



### Optical accessories

#### HONEYCOMB LOUVER

COLOUR  
traffic white  
jet black

Ø (MM)  
74  
74

ARTICLE NUMBER(S)  
048-2191317  
048-2191318



#### LINEAR PRISMATIC LENS

COLOUR  
traffic white  
jet black

Ø (MM)  
74  
74

ARTICLE NUMBER(S)  
048-2192317  
048-2192318



#### SNOOT

COLOUR  
traffic white  
jet black

Ø (MM)  
74  
74

ARTICLE NUMBER(S)  
048-2191117  
048-2191118



#### SNOOT WITH HONEYCOMB LOUVER

COLOUR  
traffic white  
jet black

Ø (MM)  
74  
74

ARTICLE NUMBER(S)  
048-2191217  
048-2191218



[048-2410637W 052-1913410] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)

01.05.2025

2 / 2