


SASSO PRO 100

adjustable offset trim square

048-2410538W 052-1952418



Project / Type	
Notes	
Count / Date	

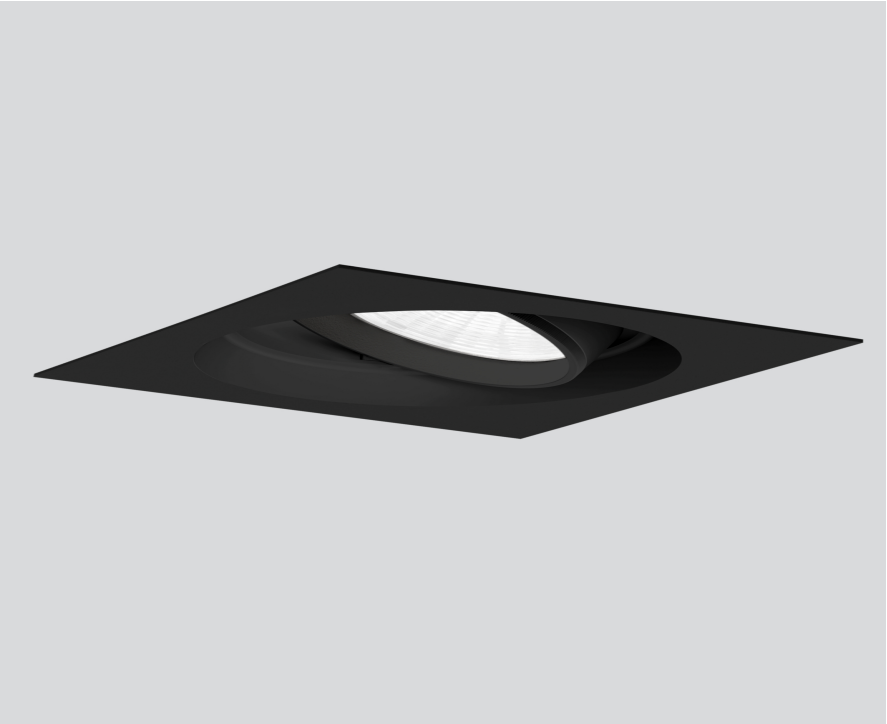

General

Ceiling Recessed	
tilt max 35°	
rotation 360°	
jet black RAL 9005 ¹	
Mounting set jet black	
IP20	
1300 lm	

LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 R _r : 89 R ₍₁₋₁₅₎ : 89	
MR 0.56 MDER 0.51	

Optical

wide flood beam angle 57°	
UGR ≤ 19 ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ² SVM ≤ 0.4 ²	

Electrical

DALI-2 1 DALI Addr.	
PC2 220-240 V	
system 14.7 W	
system 88 lm/W ³	

Physical


trim	
length 112 mm width 112 mm height 106 mm	
0.59 kg	

Cutout


diameter 108 mm	
min. ceiling thickness 5 mm max. ceiling thickness 25 mm	
recessed depth 130 mm	

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator

