

SASSO PRO 80 adjustable offset trim square

048-2310E38M 052-1952317



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL 9005 ¹	
Mounting set traffic white	
IP20	
360 lm	

LED

colour warm dimming	
1800 K - 2700 K	
CRI ≥ 95	
L80 / 50000 h	
initial MacAdam ≤ 4 SDCM	

Optical

medium	
beam angle 26°	
UGR ≤ 19 , ≥65° <1500 cd/m ²	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 6.5 W	
system 55 lm/W ³	
PC2	

Physical


trim	
length 98 mm	
width 98 mm	
height 83 mm	
0.43 kg	

Cutout


diameter 92 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Light distribution



Product drawing

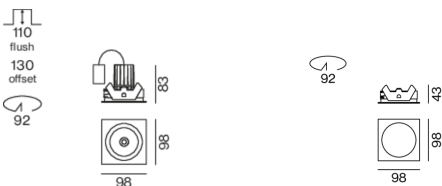

Installation instructions



Lighting calculator

