

SASSO PRO 80 adjustable

flush trimless

048-2312438M 052-1921327



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 35°

rotation 360°

black , RAL 9005 ¹

Mounting set traffic white

IP20

966 lm

LED

2700 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_{f(1-15)}: 86

MR 0.49

MDER 0.44

Optical

medium

beam angle 26°

≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 12.2 W

system 79 lm/W³

PC2

Physical

trimless

length 87 mm

width 92 mm

height 83 mm

0.47 kg

Cutout


diameter 95 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 110 mm

Light distribution



Product drawing

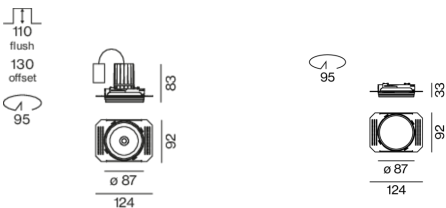

Installation instructions



Lighting calculator

