

# SASSO PRO 80 adjustable flush trim square

048-2310E37M 052-1942318



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
white , RAL 9016 <sup>1</sup>	
Mounting set jet black	
IP20	
377 lm	

## LED

colour warm dimming	
1800 K - 2700 K	
CRI ≥ 95	
L80 / 50000 h	
initial MacAdam ≤ 4 SDCM	

## Optical

medium	
beam angle 26°	
UGR ≤ 19	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	

## Electrical

DALI-2	
220-240 V	
system 6.5 W	
system 58 lm/W <sup>3</sup>	
PC2	

## Physical


trim	
length 98 mm	
width 98 mm	
height 83 mm	
0.43 kg	

## Cutout


diameter 92 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses  
& operating device efficiency

## Light distribution



## Product drawing

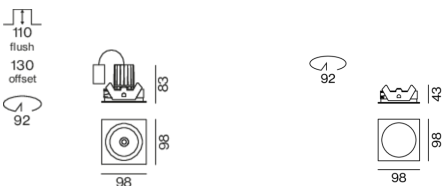

## Installation instructions



## Lighting calculator

