

SASSO PRO 80 adjustable flush trim square

048-2310618V 052-1942318



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL 9005 ¹	
Mounting set jet black	
IP20	
408 lm	

LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 94 , R _r : 87 , R ₍₁₋₁₅₎ : 90	
MR 0.86	
MDER 0.78	

Optical

super spot	
beam angle 8°	
UGR ≤ 10	

Electrical

non DIM	
220-240 V	
system 7.7 W	
system 53 lm/W ²	
PC2	


Physical

trim	
length 98 mm	
width 98 mm	
height 83 mm	
0.43 kg	


Cutout

diameter 92 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

Light distribution



Product drawing

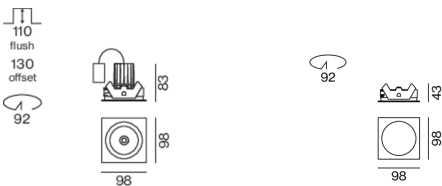

¹ RAL code

² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

