

SASSO PRO 80 adjustable offset trim square

048-2310517M 052-1952317



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
white , RAL 9016 ¹	
Mounting set traffic white	
IP20	
757 lm	

LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 89 , R ₍₁₋₁₅₎ : 89	
MR 0.56	
MDER 0.51	

Optical

medium	
beam angle 26°	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
220-240 V	
system 8.3 W	
system 91 lm/W ³	
PC2	


Physical

trim	
length 98 mm	
width 98 mm	
height 83 mm	
0.43 kg	


Cutout

diameter 92 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	

Light distribution



Product drawing

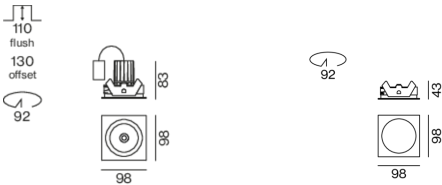

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Installation instructions



Lighting calculator

