

MINO 60 high lumen


suspended
046-42M8617G



Project / Type

Notes

Count / Date

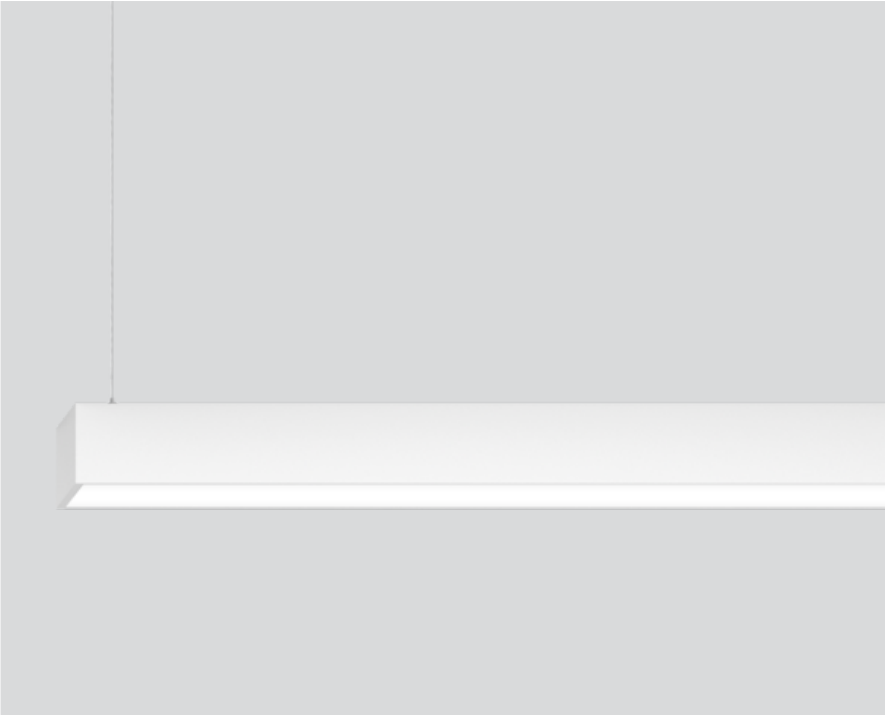

General

Ceiling | Suspended

pure white | RAL 9010

IP20

5480 lm

2340 lm/m

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

Microprismatic | microprismatic

Electrical

non DIM

PC1 | 220-240 V

system 45 W

system 122 lm/W ¹

19 W/m

Physical


cabl 1500 mm

length 2352 mm | width 60 mm | height 80 mm


6.5 kg

¹ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions

Lighting calculator

