

MINO 60 CIRCLE 6000

direct


ceiling
034-2116637H



Project / Type _____


Notes _____

Count / Date _____

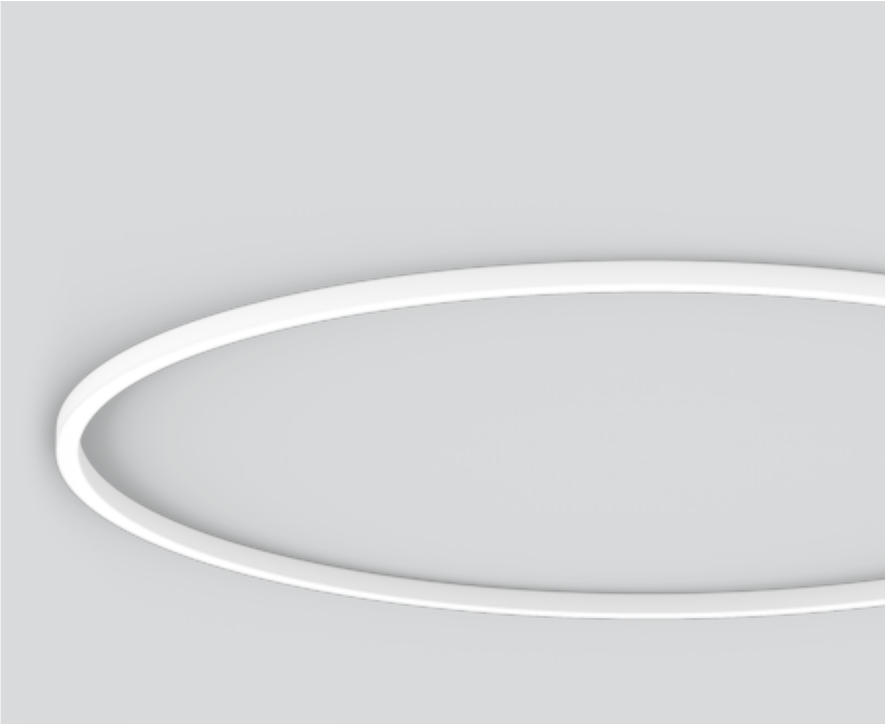


Ring-shaped light fitting in rolled and seamlessly welded extruded aluminium profile; suitable for ceiling mounting; surface white powder coated; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling | Surface _____

white | RAL 9010 ¹ _____

IP20 _____

48100 lm _____

LED

4000 K _____

CRI ≥ 80 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

MR 0.72 | MDER 0.65 _____

Optical

High Performance Opal | opal (lambertsch) _____

PstLM $\leq 1.0^2$ ³ | SVM $\leq 0.4^2$ ³ _____

Electrical

DALI-2 | 16 DALI Addr. _____

PC1 | 220-240 V _____

system 334 W _____

system 144 lm/W ⁴ _____

Physical

diameter 6060 mm | height 80 mm _____

centerline radius 3000 mm _____

41 kg _____

¹ RAL code ² combined
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



MINO 60 CIRCLE 6000

direct

ceiling
034-2116637H



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	1
B13	1
B16	1
B20	2
C10	1
C13	2
C16	2
C20	3

