

# MINO CIRCLE ACOUSTIC 1000

ceiling


034-271111W



Project / Type

Notes

Count / Date

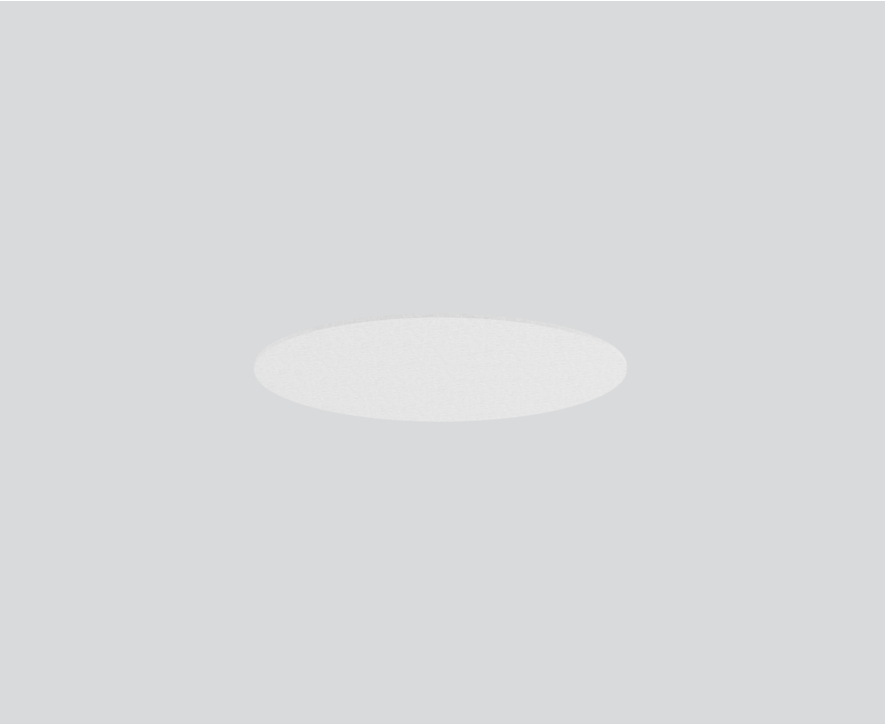

### General

Ceiling | Surface

white

fire resistance class: B-s1, d0

### Physical

diameter 937 mm | height 24 mm

4.5 kg

### Acoustics

Alpha w ( $\alpha_w$ ) up to 0.7 <sup>1</sup>

SAC (sound absorption class) up to C <sup>1</sup>

NRC up to 1.15 <sup>1</sup>

SAA up to 1.16 <sup>1</sup>


<sup>1</sup> Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 3cm

### Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, white; colour may deviate; absorption of direct sound; this creates high acoustic performance; for ceiling surface mounting;

### Product drawing



# MINO CIRCLE ACOUSTIC 1000

ceiling

034-271111W



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.27	0.7	1.17	1.07	1

## Sound absorption coefficient ( $\alpha_p$ )

