

# MINO CIRCLE ACOUSTIC 1000


ceiling  
034-271111L



Project / Type

Notes

Count / Date

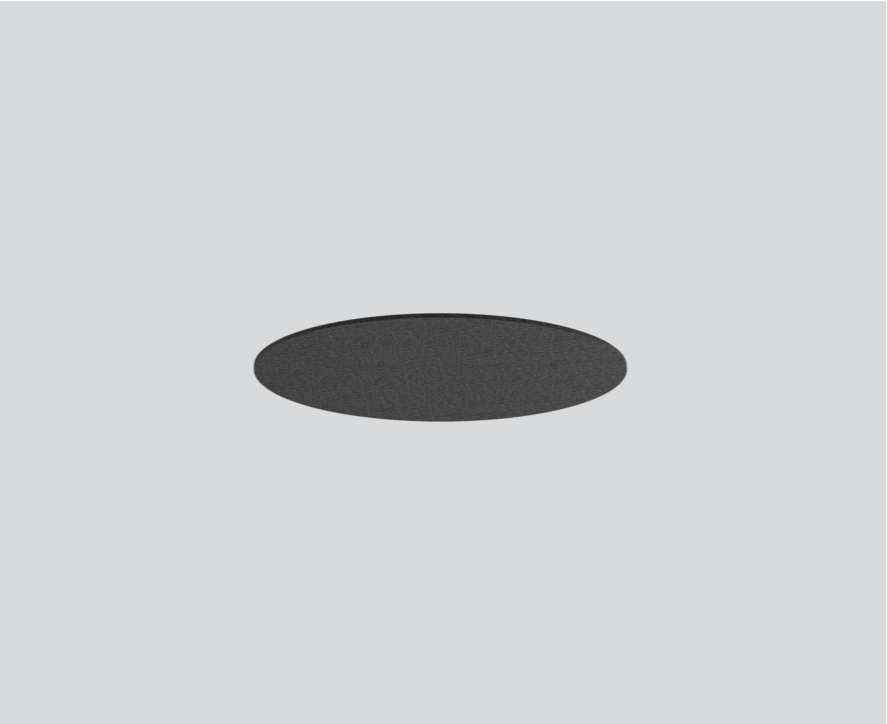

General

Ceiling | Surface

black

Physical

diameter 937 mm | height 24 mm

4.5 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.7 <sup>1</sup>

SAC (sound absorption class) up to C <sup>1</sup>

NRC up to 1.15 <sup>1</sup>

SAA up to 1.16 <sup>1</sup>


<sup>1</sup> Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 3cm

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, black; colour may deviate; absorption of direct sound; this creates high acoustic performance; for ceiling surface mounting;

## Product drawing



[‘034-271111L’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)

# MINO CIRCLE ACOUSTIC 1000

ceiling  
034-271111L



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.27	0.7	1.17	1.07	1

## Sound absorption coefficient ( $\alpha_p$ )

