# MINO CIRCLE ACOUSTIC 1500

inlay 034-270211L



Project / Type

Notes Count / Date

#### General

Luminaire / Track   Mounted
black

#### Physical

diameter 1434 mm | height 24 mm 9.4 kg


#### Acoustics

Alpha w (α <sub>w</sub> ) up to 0.65 <sup>1</sup>
SAC (sound absorption class) up to C <sup>1</sup>
NRC up to 0.7 <sup>1</sup>
SAA up to 0.74 <sup>1</sup>

 $^{\rm 1}$  Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

Installation instructions



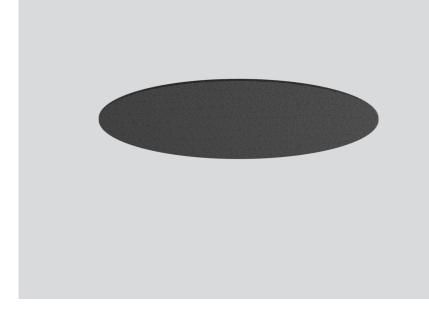

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, black; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for insertion into the MINO 60 CIRCLE 1500 ceiling or MINO 60 CIRCLE 1500 suspended;

#### Product drawing





Project / Type

Notes Count / Date

**ACOUSTIC 1500** inlay 034-270211L

**MINO CIRCLE** 



## Equivalent sound absorption area (A<sub>eq</sub>)

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.97	1.2	1.83	2.67	3.07	3.3

### Sound absorption coefficient (ap)

