

# SASSO 60 emergency light basic

trim

048-2693211 048-2696317



Project / Type

Notes

Count / Date



### General

Ceiling | Recessed

rotation 360°

black | RAL 9005 <sup>1</sup>

Mounting set traffic white

IP20

206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm

### LED

6500 K

CRI ≥ 80

### Optical

emergency light | beam angle 21°<sup>2</sup>, 103°x25°<sup>3</sup>, 149°x150°<sup>4</sup>

### Electrical

PC2 | 220-240 V

system 1.0 W

system 206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm/W <sup>5</sup>

### Physical

trim

diameter 80 mm | height 94 mm

0.27 kg

### Cutout


diameter 73 mm

min. ceiling thickness 2 mm | max. ceiling thickness 25 mm


recessed depth 110 mm

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; with test button; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

### Light distribution

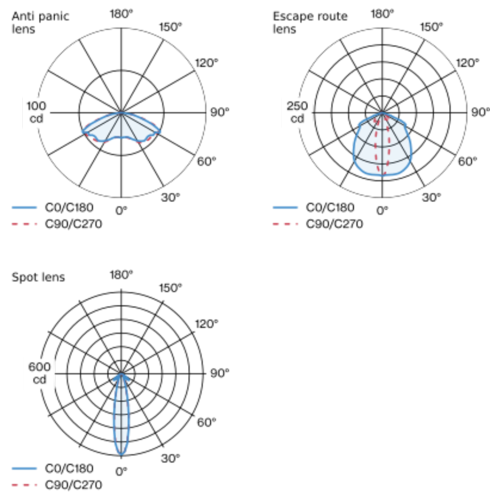

### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Spot lens <sup>3</sup> Escape route lens <sup>4</sup> Anti panic lens  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator



# SASSO 60 emergency light basic

trim  
048-2693211 048-2696317



Project / Type

Notes

Count / Date

## Components

### MOUNTING SET with trim 1 lamp

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	80	048-2696317



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



## Electrical accessories

### REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

