




Quickinfo

2700 K, 3000 K
 CRI $\geq$ 90 / 2 SDCM, 3 SDCM
 up to 95 lm/W
 L90 / 50000 h
 Casambi, DALI-2, non DIM
 IP20

Types



Colour



Canopy




Light distributions




TULA suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory


DE Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; gute Entblendung durch zurückversetzte Lichtpunktebene; inkl. hochwertiger Linsenoptik; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten, wahlweise als Einbau- oder Anbauvariante; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich




free positioning
by ring and
hook



track version
available



TULA nano suspended




MEDIUM CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.9 W, 500 mA	2700 K	790 lm	89 lm/W	0 4 9 - 5 H 1 0 4 1 M
	3000 K	816 lm	92 lm/W	0 4 9 - 5 H 1 0 5 1 M

FLOOD CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.9 W, 500 mA	2700 K	762 lm	86 lm/W	0 4 9 - 5 H 1 0 4 1 F
	3000 K	787 lm	89 lm/W	0 4 9 - 5 H 1 0 5 1 F



TULA micro suspended




MEDIUM CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.4 W, 500 mA	2700 K	648 lm	77 lm/W	0 4 9 - 5 H 1 5 4 1 M
	3000 K	746 lm	88 lm/W	0 4 9 - 5 H 1 5 5 1 M

FLOOD CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.4 W, 500 mA	2700 K	694 lm	82 lm/W	0 4 9 - 5 H 1 5 4 1 F
	3000 K	798 lm	95 lm/W	0 4 9 - 5 H 1 5 5 1 F

Electrical mounting accessories (required)



CANOPY for cable suspension 500 mA, PC2, 198-264 V AC

TYPE	COLOUR	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W non DIM	traffic white	η 84 %	115:29	0 0 5 - 2 6 0 2 1 1 7
13 W non DIM	jet black	η 84 %	115:29	0 0 5 - 2 6 0 2 1 1 8
10 W DALI-2	jet black	η 85 %	115:29	0 0 5 - 2 6 0 2 1 3 8
10 W Casambi	jet black	η 83 %	115:29	0 0 5 - 2 6 0 2 1 9 8

incl. power supply

CANOPY for cable suspension 500 mA, 10 W, PC2, 198-264 V AC, traffic white

TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
DALI-2	η 85 %	115:29	0 0 5 - 2 6 0 2 1 3 7
Casambi	η 83 %	115:29	0 0 5 - 2 6 0 2 1 9 7

incl. power supply

Mounting accessories (required)




MOUNTING SET trimless

TYPE	COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
for installation in plasterboard ceilings	traffic white	9-25 mm	75:48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply

Order options

HEIGHT	H	COLOUR	
300 mm	5	chrome	4
500 mm	7	traffic white RAL 9016	7
		jet black RAL 9005	8
		special colours	X

**MOUNTING SET with trim** for installation in ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	0 0 5 - 3 5 2 1 0 1 7
jet black	77·49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply

Mounting accessories (optional)**HOOK ceiling mounted**

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	18·58	0 5 0 - 0 5 1 0 3 1 7
jet black	18·58	0 5 0 - 0 5 1 0 3 1 8

**RING ceiling mounted**

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	50·88	0 5 0 - 0 5 1 0 2 1 7
jet black	50·88	0 5 0 - 0 5 1 0 2 1 8

**SPECIAL MOUNTING TOOL**

TYPE	Ø·H (mm)	ORDER CODE
for ARY MOVE IN 45 NOBA trimless TULA	100·107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless


Electrical accessories (required)**POWER SUPPLY** 500 mA, 10 W, PC2, 198-264 V AC

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
non DIM	η 80 %	65·39·20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147·33·23	0 0 2 - 9 0 7 3 3

Electrical accessories (optional)**DIN RAIL LED DRIVER**

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses	36·88·59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V

**DIN RAIL POWER SUPPLY**

L·W·H (mm)	ORDER CODE
72·90·63	0 0 5 - 6 5 2 0 2 1 0

220-240 V AC | 160 W | 48V DC constant voltage

Optical accessories (optional)**HONEYCOMB LOUVER**

TYPE	COLOUR	Ø·H (mm)	ORDER CODE
for BO 45 JUST 45 MOVE IN 45 TARO 45 TULA micro	jet black	42·3	0 0 7 - 1 9 6 5 1 8 8

OVAL LENS

TYPE	Ø·H (mm)	ORDER CODE
for BO 45 MOVE IN 45 TULA micro	42·3	0 0 7 - 1 9 6 5 8 8 0

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
for ARY BO 45 MOVE IN 45 TULA micro	42:3	0 0 7 - 1 9 6 5 9 8 0

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
for ARY BO 45 MOVE IN 45 TULA micro	42:3	0 0 7 - 1 9 6 5 7 8 0

Private Residence, Denmark

Denmark

Architect

LINK Architecture

Lighting Design

anker & co

Photographer


Kris Dekeijser



Used products




TULA suspended



**MOVE IT 25 trimless
system**



**SPOT LINE MOVE IT
25**

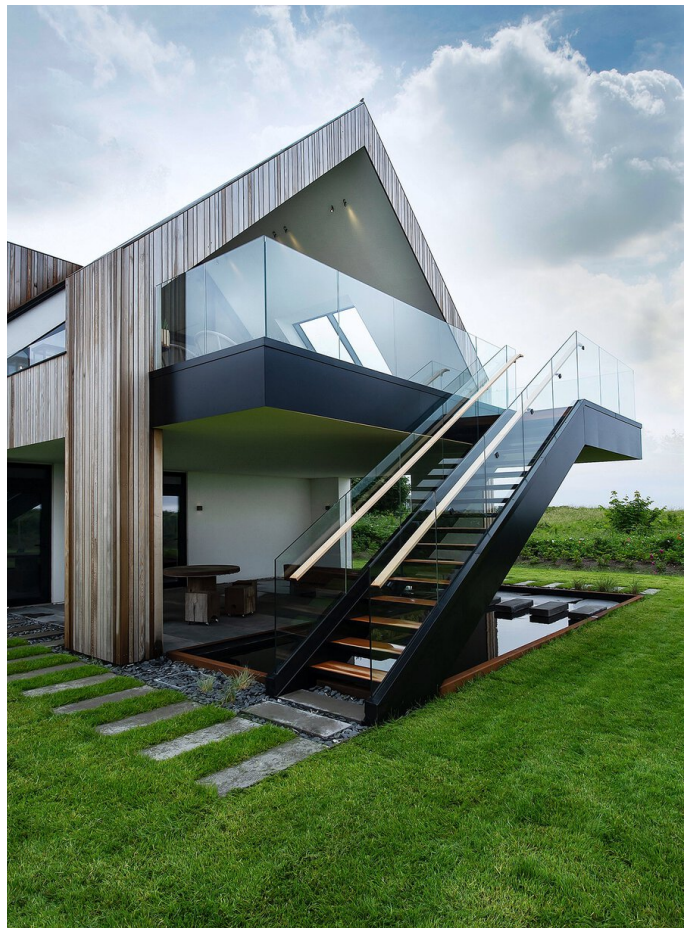



Trippenhuis

Netherlands

Architect

Arpalight

Photographer


Rene de Wit Max Hart
Nibbrig



Used products




**SASSO 60 round
semi-recessed**



**BO 32 / 45 / 55
intrack**



TULA suspended



**MOVE IT 25 trimless
system**



**BO 32 / 45 / 55
intrack 1 | 2 | 3 lamps**



**SASSO 60 round
ceiling**



