

RECOVER PRO 1350

099-2210037



Project / Type

Notes

Count / Date



General

Wall | Surface

pure white | RAL 9010

IP40

indirect 6 lm | direct 156¹, 156², 683³, 1480⁴, 14600⁵ lm

total 162¹, 162², 683³, 1480⁴, 14600⁵ lm

162¹, 162², 683³, 1480⁴, 14600⁵ lm

LED

3000 K¹, 3000 K², 3000 K³, 3000 K⁴, tunable white⁵ | 2200 K - 31000 K

CRI ≥ 97¹, 97², 97³, 97⁴, 70⁵

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 102 | R_f: 96 | R_{f(1-15)}: 96

MR 0.63 | MDER 0.57

Electrical

DALI-2 master control

PC1 | 220-240 V

system 2.3¹, 2.3², 12.2³, 23.5⁴, 159⁵ W

system 70¹, 70², 56³, 63⁴ lm/W⁶

Physical

length 1350 mm | width 223 mm | height 80 mm

12.2 kg

¹ NURSE LIGHT LEFT ² NURSE LIGHT RIGHT

³ READING LIGHT ⁴ EXAMINATION LIGHT ⁵ AMBIENT LIGHT

⁶ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LED wall mounted light for standard nursing area; IP 40 protection; 1 pc per bed; mounting height of upper edge of luminaire: 180cm; rectangular luminaire profile with direct / indirect light distribution, surface white powder coated; end cap in same colour; direct and indirect light exit with clear toughened glass cover; cable inlet on the wall side for 220-240V power supply and 2 control lines for the examination light circuit and the reading light; power feed from the rear (wall mounting profile preassembled); Luminaire offers 4 kinds of lighting; 1) Reading light 3000K; flush mounted, equipped with lens technology to avoid glare to neighbouring bed; 2-stage reading light, switchable by means of a connection to a potential-free contact (e.g., via a patient terminal provided by the customer); reading light > 300lx; 2) Nurse's night light, 3000K, right and left side (operation via integrated buttons); 3) Examination light 3000K; Em> 1000lx; operation of the examination light via RECOVER MASTER UNIT; 4) Indirect, dynamic room lighting that recreates the changes in natural daylight; the dynamic colour temperature of 2200K to 31000K, which changes with daylight, and the dynamic light intensity can be individually set and saved via XAL RECOVER SOFTWARE and can then be retrieved from the RECOVER MASTER UNIT; monitoring of the bed area via integrated presence sensor; LED boards are dimmed via analogue controlled operating devices (flicker-free, no PWM); maximum power consumption 197W; luminous flux at 5000K 14630lm; L80 min. 80% of luminous flux after 50000 operating hours; colour rendering of examination/reading light and at 2700K indirect ambient light: CRI > 90, CRI typically 95; colour point binning at 2700K: directly on the BBL, colour homogeneity: initial <3-Step SDCM scale, colour point stability: final after 10000 hrs <4-Step SDCM scale; PC I; complies with the following provisions: EN (IEC) 60598-1 and the supplement EN (IEC) 60598-2-25; luminaire unit complies with the requirements of DIN 5035-3 and EN 12464-1 (reading area, examination...) when mounted centrally above the bed's central axis, conforms to planning recommendation DIN SPEC 67600 - biologically effective illumination. Dimensions of housing W 1350mm, visible H 47mm, wall profile H 80mm, D 223mm; Manufacturer XAL, type RECOVER pro 1350 necessary accessories per room: RECOVER MASTER UNIT (up to 6 pcs RECOVER PRO can be controlled), flush-mounted electronics wall socket; optional accessories: DAYLIGHT / MOVEMENT SENSOR per room (3 variants: recessed in ceiling - installation depth 46mm; semi-recessed, installation with base, installation depth 20mm; surface mounted - installation height 40mm).



[099-2210037] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

12.08.2025

RECOVER PRO 1350

099-2210037




Project / Type

Notes

Count / Date

Light distribution

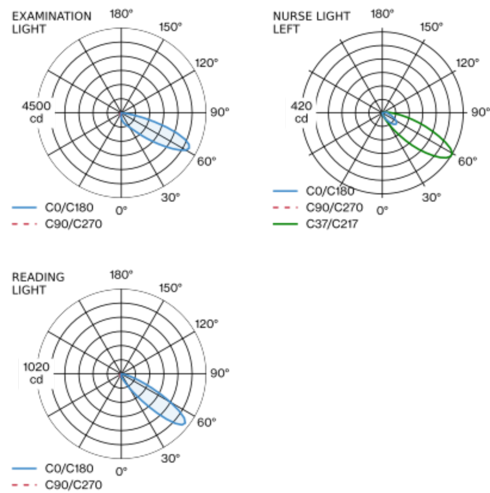

Product drawing

