

ABSORBER RING


059-771121W



Project / Type


Notes

Count / Date

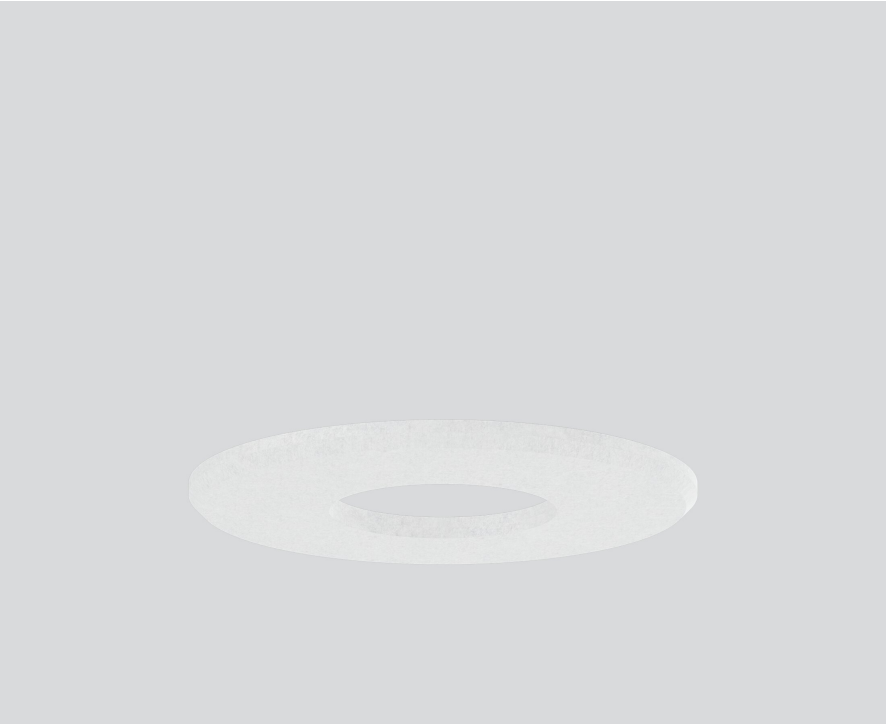

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, white; colour may deviate; high acoustic performance by doubling the material; for attaching to SONIC suspended or SONIC free standing;

Product drawing



General

Luminaire / Track | Mounted

white

fire resistance class: B-s1, d0

Physical

diameter 1050 mm | height 50 mm

12.5 kg

Acoustics

Alpha w (α_w) up to 0.7 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.85 ¹

SAA up to 0.91 ¹

¹ Acoustic data calculations based on SONIC ACOUSTIC ABSORBER ring 1280, cavity 180cm

Installation instructions



Absorber Ring

059-771121W



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.2	0.53	1.08	1.62	1.66	1.62

Sound absorption coefficient (α_p)

