


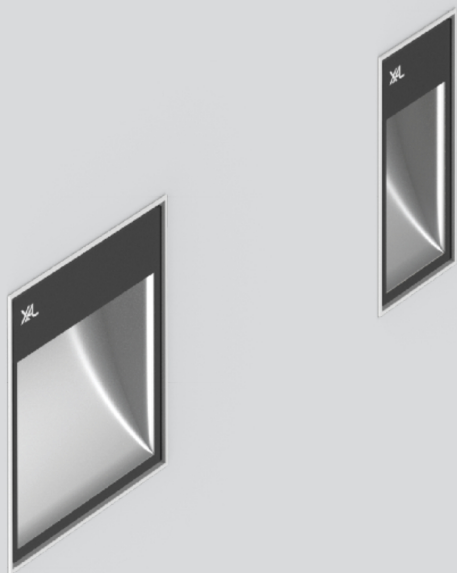

UNICO wall

recessed


EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

DE Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM
up to 62 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non DIM
IP20

Types



Colour



Mounting set



Light distributions




homogeneous
floor
illumination




safety glass for
dust protection



tunable white
2700 – 5000 K
(optional)




UNICO wall 1 lamp recessed




WIDE FLOOR CRI ≥ 90, jet black

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.9 W	2700 K	492 lm	50 lm/W	0 9 0 - 6 L 1 4 ◆ U B 0 0 1
	3000 K	524 lm	53 lm/W	0 9 0 - 6 L 1 5 ◆ U B 0 0 1
	4000 K	562 lm	57 lm/W	0 9 0 - 6 L 1 6 ◆ U B 0 0 1




UNICO wall 2 lamps recessed




WIDE FLOOR CRI ≥ 90, jet black

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	0 9 0 - 6 L 2 4 ◆ U B 0 0 1
	3000 K	995 lm	58 lm/W	0 9 0 - 6 L 2 5 ◆ U B 0 0 1
	4000 K	1070 lm	62 lm/W	0 9 0 - 6 L 2 6 ◆ U B 0 0 1




Planning Information

wide floor

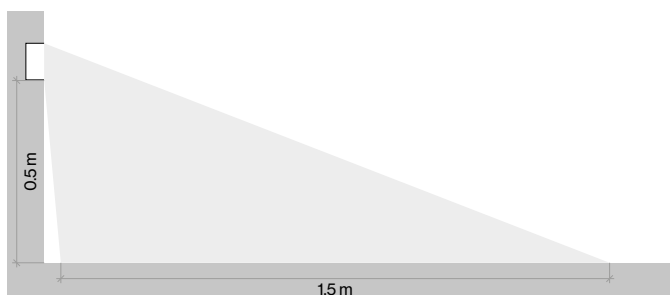


Mounting accessories (required)



MOUNTING SET trimless

TYPE	L·W·H (mm)	ORDER CODE
for plasterboard ceilings 12.5/15/20/25 mm	85·47·47	0 9 0 - 7 L 2 0 1 0 0

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET trimless

TYPE	L·W·H (mm)	ORDER CODE
for plasterboard ceilings 12.5/15/20/25 mm	85·85·47	0 9 0 - 7 Q 4 0 1 0 0

for UNICO Q4 | UNICO wall recessed 2 lamps

Order options


CONTROL	◆	COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3		



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101-63-30	0 9 0 - 7 L 2 0 2 0 B
traffic white	101-63-30	0 9 0 - 7 L 2 0 2 0 W

for UNICO L2 and UNICO wall recessed 1 lamp




MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101-101-30	0 9 0 - 7 Q 4 0 2 0 B
traffic white	101-101-30	0 9 0 - 7 Q 4 0 2 0 W

for UNICO Q4 | UNICO wall recessed 2 lamps

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

L·W·H (mm)	ORDER CODE
240-400-130	0 5 2 - 1 9 1 4 3 2 0

order mounting set separately