INO 700 circle acoustic

luminaire mounted 034-370211X



Project / Type

Notes Count / Date



Physical

diameter 648 mm | height 9 mm 1.06 kg

Acoustics

Alpha w (α _w) up to 0.6 ¹
SAC (sound absorption class) up to C ¹
NRC up to 0.55 ¹
SAA up to 0.57 ¹
Acoustic data calculations based on INO CIRCLE ACOUSTIC 700 circle, cavity 100cm

¹ Acoustic data calculations based on INO CIRCLE ACOUSTIC 700 circle, cavity 100cm

Installation instructions





Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, acoustic special colours; colour may deviate; for mounting on the INO circle suspended cable suspensions, above the luminaire; subsequent attachment possible;



INO 700 circle acoustic

luminaire mounted 034-370211X




Project / Type

Notes Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.2	0.27	0.33	0.4	0.5	0.57

Sound absorption coefficient (ap)

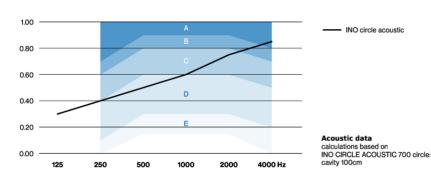



09.05.2025