INO 700 circle acoustic

luminaire mounted 034-370211W



Project / Type

Notes Count / Date

General

| Luminaire / Track Mounted | |
|-----------------------------|--|
| white | |

Physical

diameter 648 mm | height 9 mm 0.84 kg

Acoustics

| Alpha w (α _w) up to 0.6 ¹ |
|---|
| SAC (sound absorption class) up to C ¹ |
| NRC up to 0.55 ¹ |
| SAA up to 0.57 ¹ |
| Acoustic data calculations based on INO CIRCLE ACOUSTIC 700 circle, cavity 100cm |

¹ Acoustic data calculations based on INO CIRCLE ACOUSTIC 700 circle, cavity 100cm

Installation instructions





Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, white; colour may deviate; for mounting on the INO circle suspended cable suspensions, above the luminaire; subsequent attachment possible;



INO 700 circle acoustic

luminaire mounted 034-370211W




Project / Type

Notes Count / Date

Equivalent sound absorption area (A_{eq})

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 0.2 | 0.27 | 0.33 | 0.4 | 0.5 | 0.57 |

Sound absorption coefficient (ap)

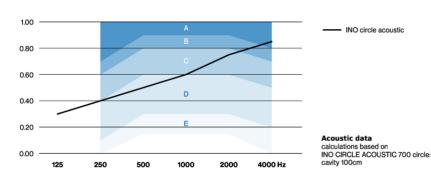



07.07.2025