

TASK sensor direct / indirect asymmetric power

free standing double long
X059-2901178Z



Project / Type


Notes

Count / Date




Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged linear; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base (H-shape); surface jet black powder coated; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special, inclined PCBs for asymmetric radiation characteristic; microprismatic PMMA cover; completely homogeneous illumination; $UGR \leq 13$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour 4000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; $CRI \geq 90$; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; luminaire with integrated infrared presence and brightness sensor (ESSENTIAL sensor); automatic light control for individually adjustable brightness; variable automatic shutdown; including TOUCH DIM control for individual control of the brightness; presence sensor detection range $\varnothing 4,5\text{m}$ on the floor; incl. connection cable (3m) with safety plug; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Floor | Standing

jet black | RAL 9005

IP20

indirect 21900 lm | direct 4050 lm

total 25950 lm

LED

4000 K

$CRI \geq 90$

L90 / 50000 h

initial MacAdam $\leq 3 \text{ SDCM}$

$R_g: 96 | R_f: 90 | R_{t(1-15)}: 87$

MR 0.75 | MDER 0.68

Optical

Microprismatic | microprismatic

$UGR \leq 13 | \geq 65^\circ < 3000 \text{ cd/m}^2$

$P_{stLM} \leq 1.0^{1,2} | SVM \leq 0.4^{1,2}$

Electrical

stand alone ESSENTIAL sensor

brightness & presence

PC1 | 220-240 V

system 190 W

system 137 lm/W³

Physical

H-shape

length 1750 mm | width 320 mm | height 2137 mm

22.4 kg

¹ combined ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



TASK sensor direct / indirect asymmetric power

free standing double long
X059-2901178Z



Project / Type

Notes

Count / Date

Maintenance Factors


Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.97	0.95	0.93	0.92
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a Room Surface Maintenance Factor		
MF	Maintenance Factor		LLMF Lamp Lumens Maintenance Factor		
LMF ^a	Luminaire Maintenance Factor		LSF Lamp Survival Factor		

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	2
B13	3
B16	4
B20	5
C10	4
C13	5
C16	7
C20	9

Colour rendering

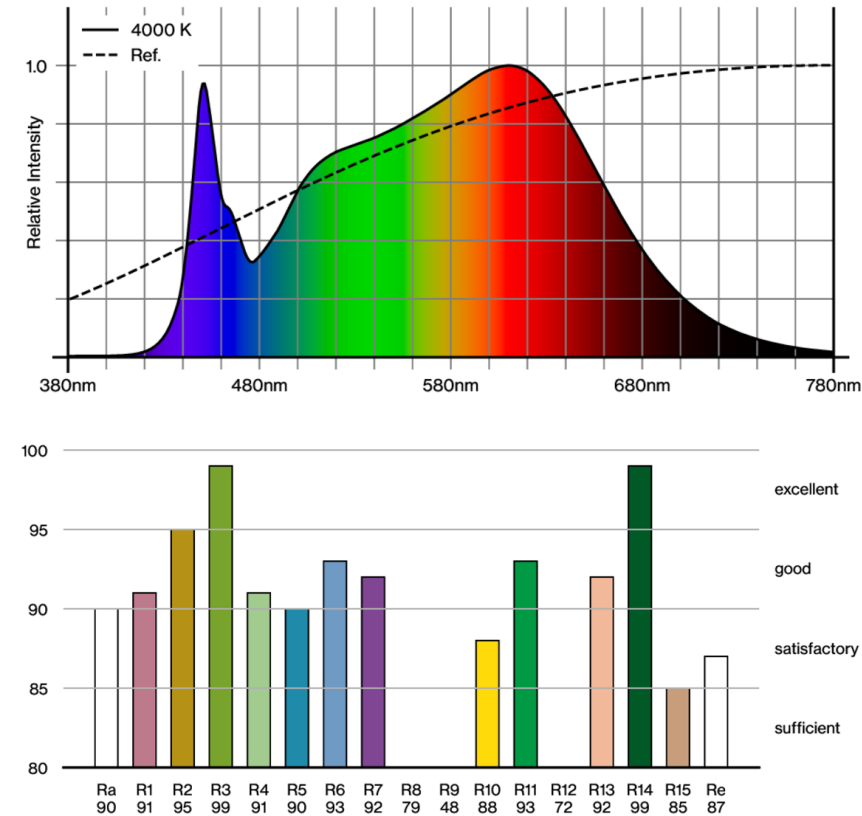

TM30 colour vector graphic

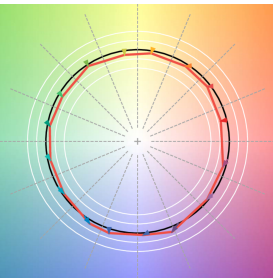

The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

