

# TASK direct / indirect asymmetric power

free standing double long  
X059-2901158Z



Project / Type


Notes

Count / Date




Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged linear; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base (H-shape); surface jet black powder coated; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special, inclined PCBs for asymmetric radiation characteristic; microprismatic PMMA cover; completely homogeneous illumination;  $UGR \leq 13$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 3000 \text{ cd/m}^2$ ; light colour 4000 K; binning initial MacAdam  $\leq 3 \text{ SDCM}$ ;  $CRI \geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; including TOUCH DIM control for individual control of the brightness; incl. connection cable (3m) with safety plug; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Floor | Standing

jet black | RAL 9005

IP20

indirect 21900 lm | direct 4050 lm

total 25950 lm

## LED

4000 K

$CRI \geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3 \text{ SDCM}$

$R_g: 96 | R_f: 90 | R_{t(1-15)}: 87$

MR 0.75 | MDER 0.68

## Optical

Microprismatic | microprismatic

$UGR \leq 13 | \geq 65^\circ < 3000 \text{ cd/m}^2$

$P_{stLM} \leq 1.0^{1,2} | SVM \leq 0.4^{1,2}$

## Electrical

touch DIM on pole

PC1 | 220-240 V

system 190 W

system 137 lm/W<sup>3</sup>

## Physical

H-shape

length 1750 mm | width 320 mm | height 2137 mm

<sup>1</sup> combined <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# TASK direct / indirect asymmetric power

free standing double long  
X059-2901158Z



Project / Type

Notes

Count / Date

## Maintenance Factors



Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.97	0.95	0.93	0.92
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	2
B13	3
B16	4
B20	5
C10	4
C13	5
C16	7
C20	9

## Colour rendering

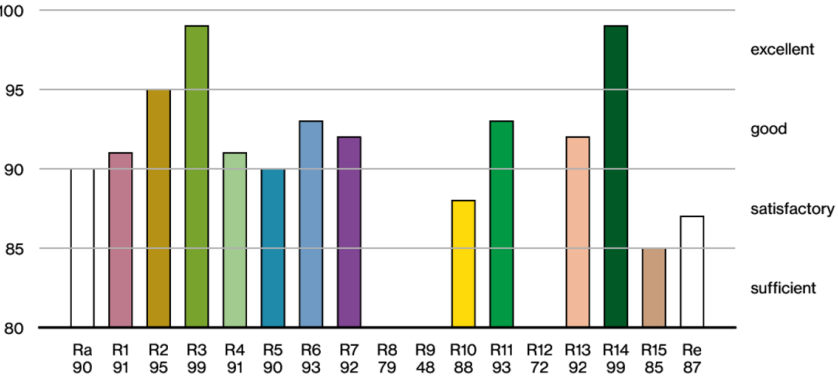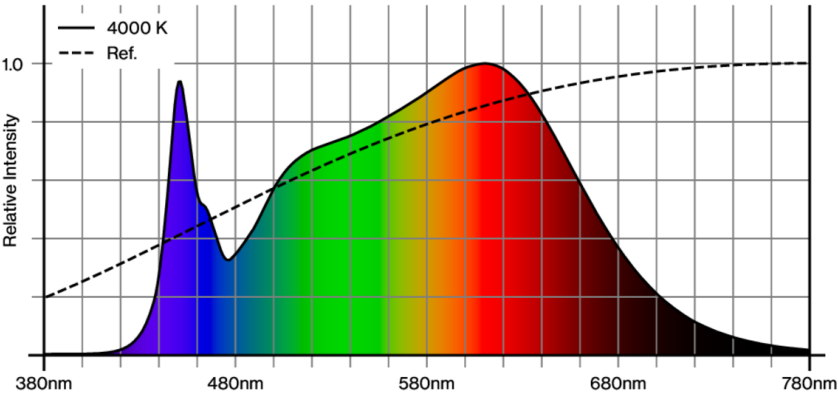

## TM30 colour vector graphic

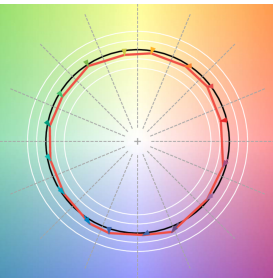

The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.



[X059-2901158Z] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)

03.08.2025