


BETO sensor direct / indirect

free standing U-shape

074-6944577B



Project / Type	
Notes	
Count / Date	

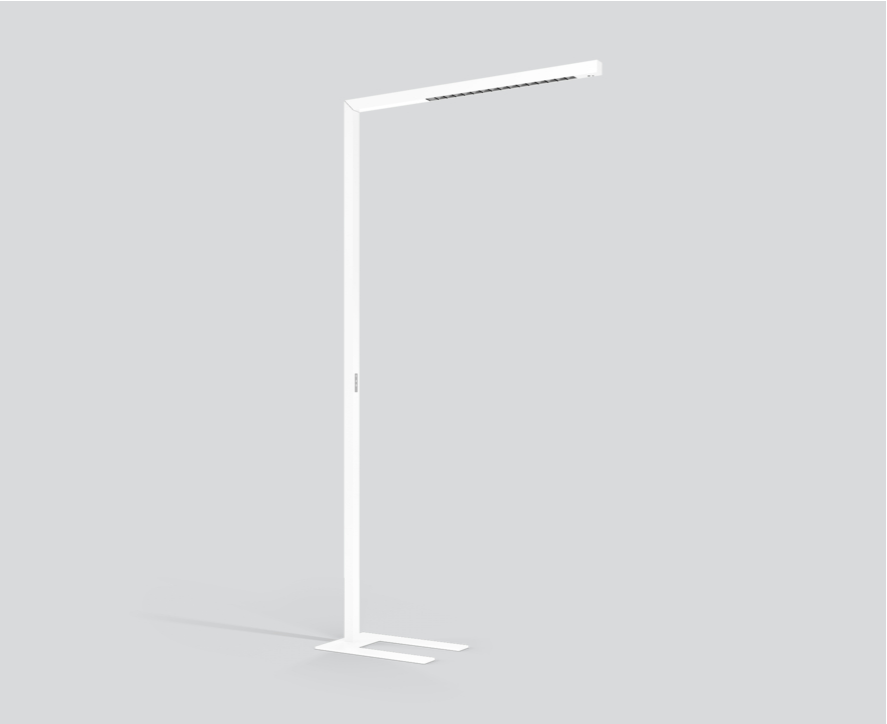

General

Floor , Standing	
white , RAL 9010 ¹	
Reflector dark chrome	
IP20	
indirect 5020 lm	
direct 1320 lm	
total 6340 lm	

LED

3000 K	
CRI ≥ 80	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.56	
MDER 0.51	

Optical

Reflector	
asymmetric	
UGR ≤ 10	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	


Electrical

stand alone ESSENTIAL sensor	
brightness & presence	
220-240 V	
system 51 W	
system 124 lm/W ³	
PC1	

Physical

U-shape	
length 1055 mm	
width 42 mm	
height 2100 mm	

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Installation instructions

