

# MOVE IT 25 ACOUSTIC triangle


inlay  
050-231421W



Project / Type

Notes

Count / Date

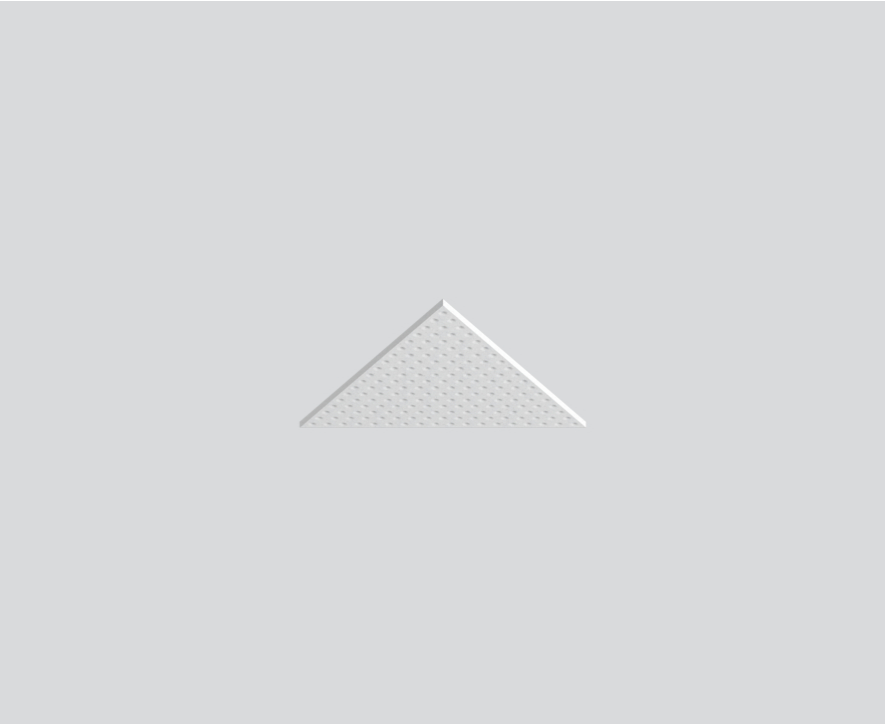

General

Luminaire / Track | Mounted

white

fire resistance class: B-s1, d0

Physical

panel only for NODE connector + track 1210 mm

length 1195 mm | width 1035 mm | height 25 mm

3.1 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 1<sup>1</sup>

SAC (sound absorption class) up to A<sup>1</sup>

NRC up to 1.3<sup>1</sup>

SAA up to 1.32<sup>1</sup>


<sup>1</sup> Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; triangular design; high quality visual and tactile surface with embossed pattern, white; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

## Product drawing



# MOVE IT 25 ACOUSTIC triangle

inlay  
050-231421W



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.33	0.57	0.73	0.97	1.27	1.33

## Sound absorption coefficient ( $\alpha_p$ )

