

MOVE IT 25 / 45

ACOUSTIC double grid


inlay
050-231321W



Project / Type


Notes

Count / Date

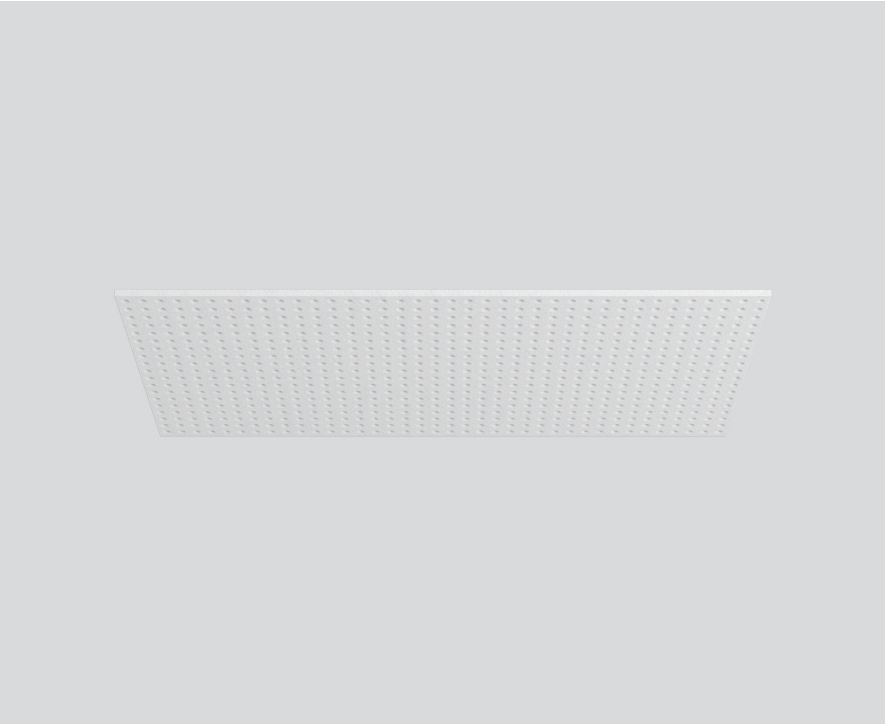

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; rectangular design; high quality visual and tactile surface with embossed pattern, white; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

Product drawing



General
white
fire resistance class: B-s1, d0
PET felt (made of at least 50% post-consumer recycled material)

Physical
panel only for NODE connector + track 1210 mm
length 2435 mm | width 1235 mm | height 25 mm
11 kg

Acoustics
Alpha w (α_w) up to 1¹
SAC (sound absorption class) up to A¹
NRC up to 1.3¹
SAA up to 1.32¹

¹ Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm

Installation instructions



MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321W



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
1.3	2.73	3.2	4.1	4.97	5.23

Sound absorption coefficient (α_p)

