


MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321D



Project / Type	
Notes	
Count / Date	

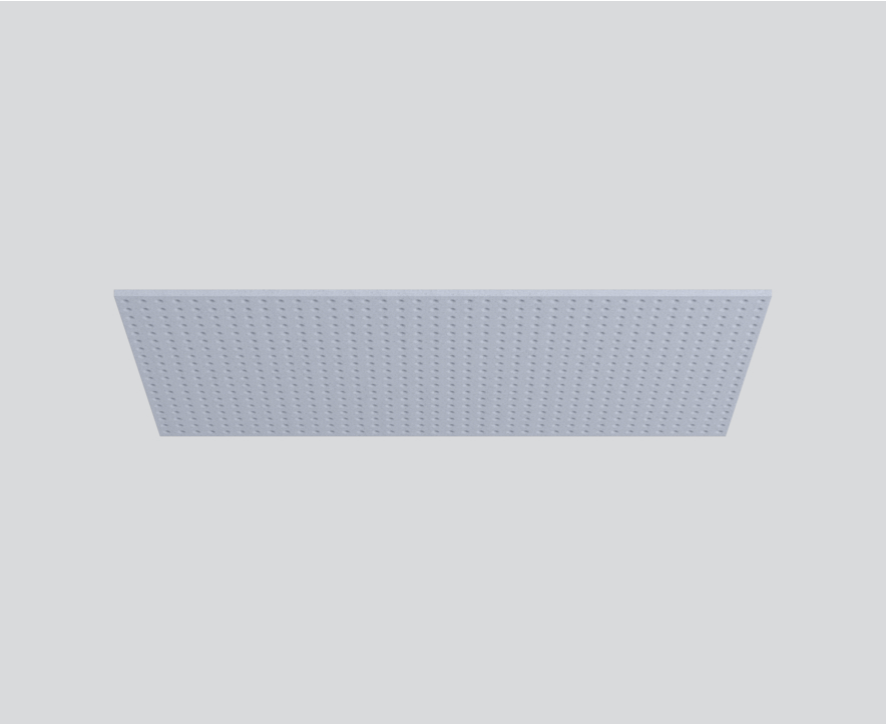

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; rectangular design; high quality visual and tactile surface with embossed pattern, marble grey; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

Product drawing



General

Luminaire / Track , Mounted	
marble grey	

Physical

panel only for NODE connector + track 1210 mm	
length 2435 mm	
width 1235 mm	
height 25 mm	

Acoustics

Alpha w (α_w) up to 1 ¹	
SAC (sound absorption class) up to A ¹	
NRC up to 1.3 ¹	
SAA up to 1.32 ¹	

¹ Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm

Installation instructions



MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321D



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
1.3	2.73	3.2	4.1	4.97	5.23

Sound absorption coefficient (α_p)

