

# MOVE IT 25 / 45

## ACOUSTIC half grid


inlay  
050-231221L



Project / Type


Notes

Count / Date

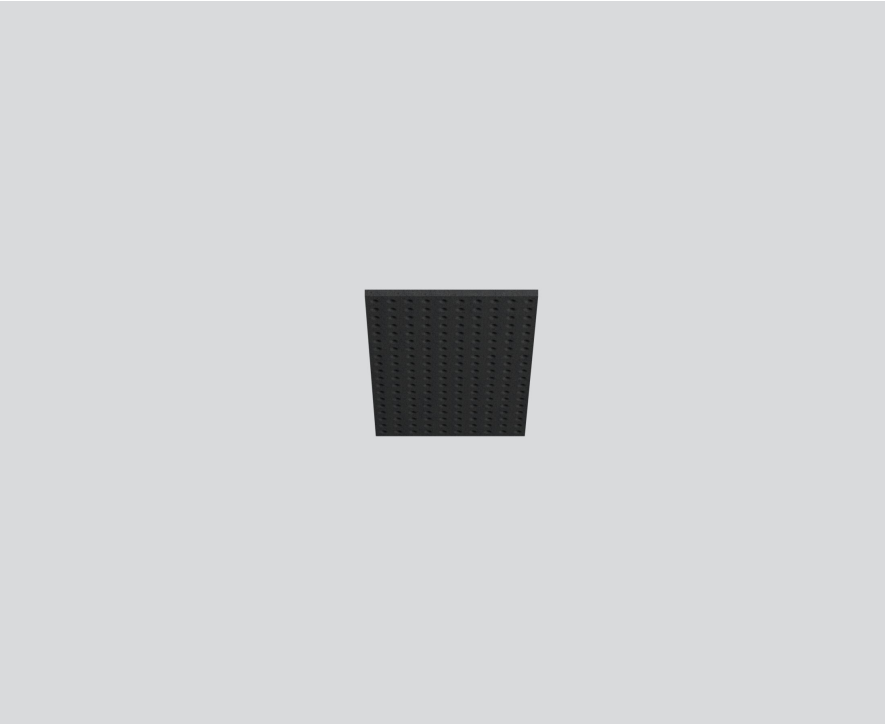

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; rectangular design; high quality visual and tactile surface with embossed pattern, black; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

### Product drawing



**General**  
Luminaire / Track | Mounted  
black  
fire resistance class: B-s2, d0

**Physical**  
panel only for NODE connector + track 1210 mm  
length 635 mm | width 1235 mm | height 25 mm  
7.3 kg

**Acoustics**  
Alpha w ( $\alpha_w$ ) up to 1<sup>1</sup>  
SAC (sound absorption class) up to A<sup>1</sup>  
NRC up to 1.3<sup>1</sup>  
SAA up to 1.32<sup>1</sup>

<sup>1</sup> Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm

### Installation instructions

