

# MINO 60 high lumen

suspended


046-42M8138Z



Project / Type

Notes

Count / Date

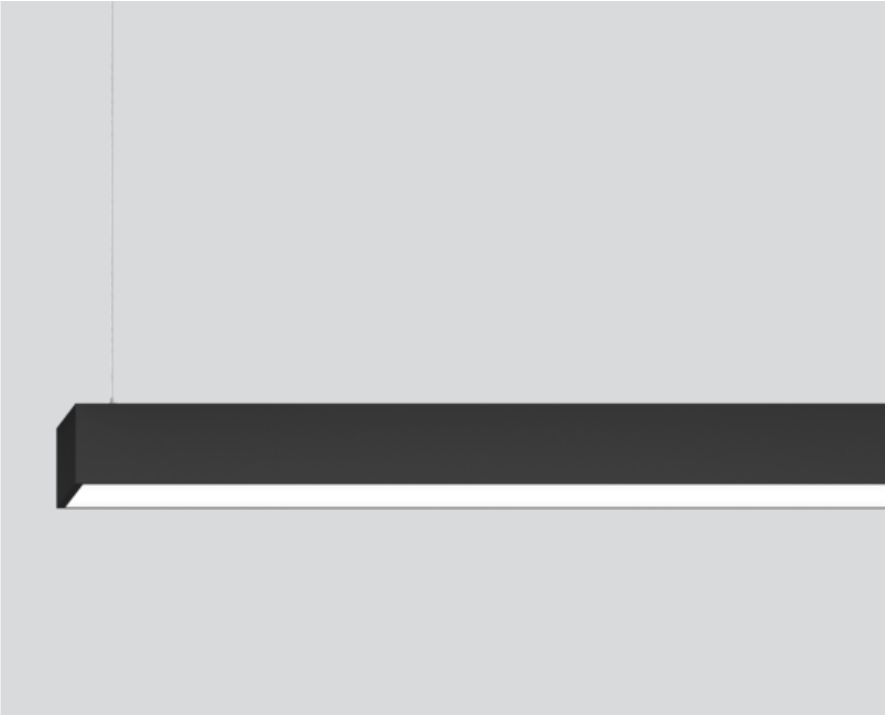

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface jet black powder coated; suspended luminaire with 1500mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; incl. feed (black); lighting profile (end cover pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



### General

Ceiling | Suspended

jet black | RAL 9005

IP20

4470 lm

1910 lm/m

### LED

4000 K

CRI  $\geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 99 | R<sub>f</sub>: 92 | R<sub>1-15</sub>: 90

MR 0.81 | MDER 0.74

### Optical

Microprismatic | microprismatic

PstLM  $\leq 1.0$  <sup>1</sup> | SVM  $\leq 0.4$  <sup>1</sup>

### Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 45 W

system 99 lm/W <sup>2</sup>

19 W/m

### Physical

cable 1500 mm


length 2352 mm | width 60 mm | height 80 mm

6.5 kg

### Light distribution



### Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator



# MINO 60 high lumen

suspended

046-42M8138Z



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.98   | 0.96   | 0.94   | 0.92   | 0.9    |
| LSF                | 1      | 1      | 1      | 1      | 1      |


|                  |                              |  |                   |                                 |  |
|------------------|------------------------------|--|-------------------|---------------------------------|--|
| MF               | LMF × RSMF × LLMF × LSF      |  | RSMF <sup>a</sup> | Room Surface Maintenance Factor |  |
| MF               | Maintenance Factor           |  | LLMF              | Lamp Lumens Maintenance Factor  |  |
| LMF <sup>a</sup> | Luminaire Maintenance Factor |  | LSF               | Lamp Survival Factor            |  |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 7                  |
| B13                            | 10                 |
| B16                            | 12                 |
| B20                            | 14                 |
| C10                            | 10                 |
| C13                            | 20                 |
| C16                            | 24                 |
| C20                            | 28                 |

## Colour rendering

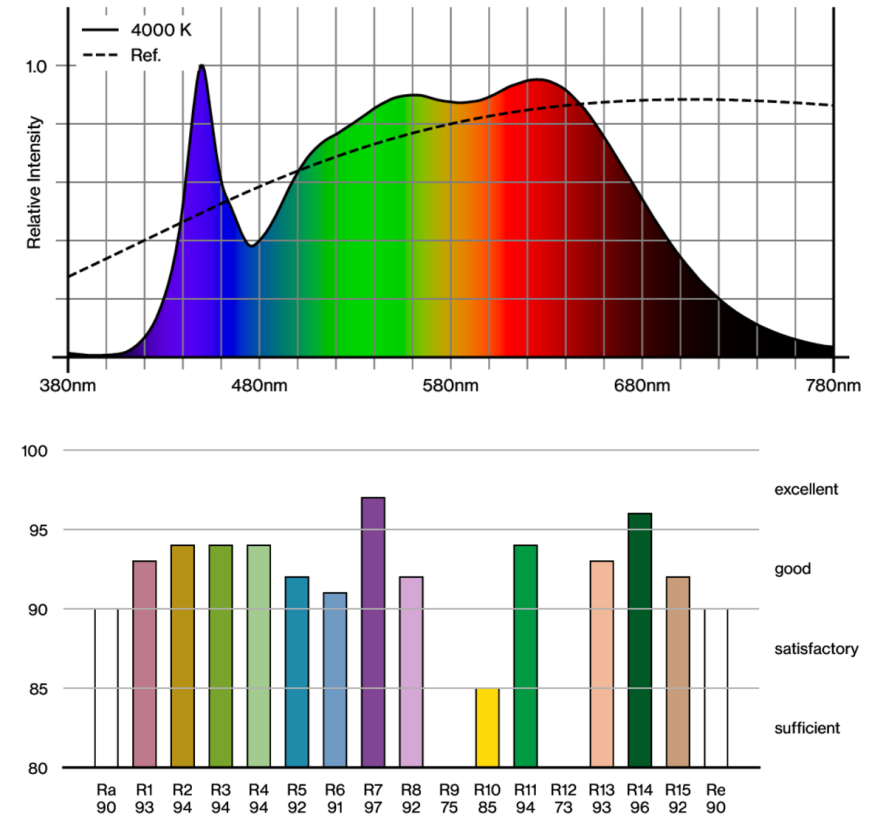

## TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

