


MINO 60 high lumen

suspended

046-42M3038Z



Project / Type _____
Notes _____
Count / Date _____

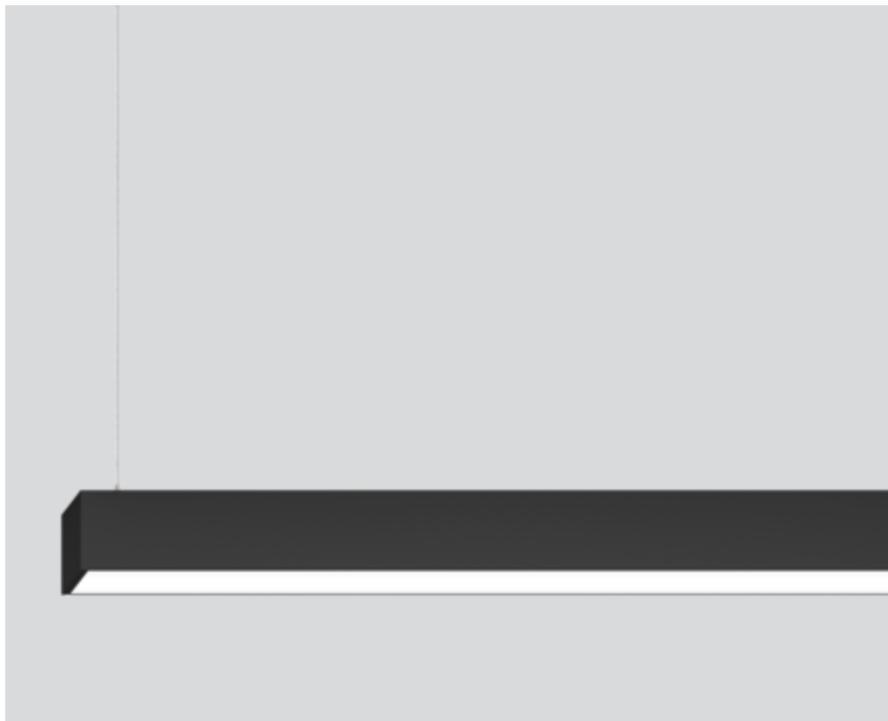

General

Ceiling | Suspended
black | RAL 9005 ¹
IP20
1550 lm
1780 lm/m

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 | R_r: 91 | R_{f(15)}: 89
MR 0.61 | MDER 0.55

Optical

Microprismatic | microprismatic
PstLM ≤ 1.0 ² | SVM ≤ 0.4 ²

Electrical


DALI-2 | 1 DALI Addr.
PC1 | 220-240 V
system 17.5 W
system 89 lm/W ³
20 W/m

Physical


cable 1500 mm
length 880 mm | width 60 mm | height 80 mm
2.91 kg

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface black powder coated; suspended luminaire with 1500mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; incl. feed (black); lighting profile (end cover pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

