

# TILA 22 suspended

MOVE IT 10


030-6640534M



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

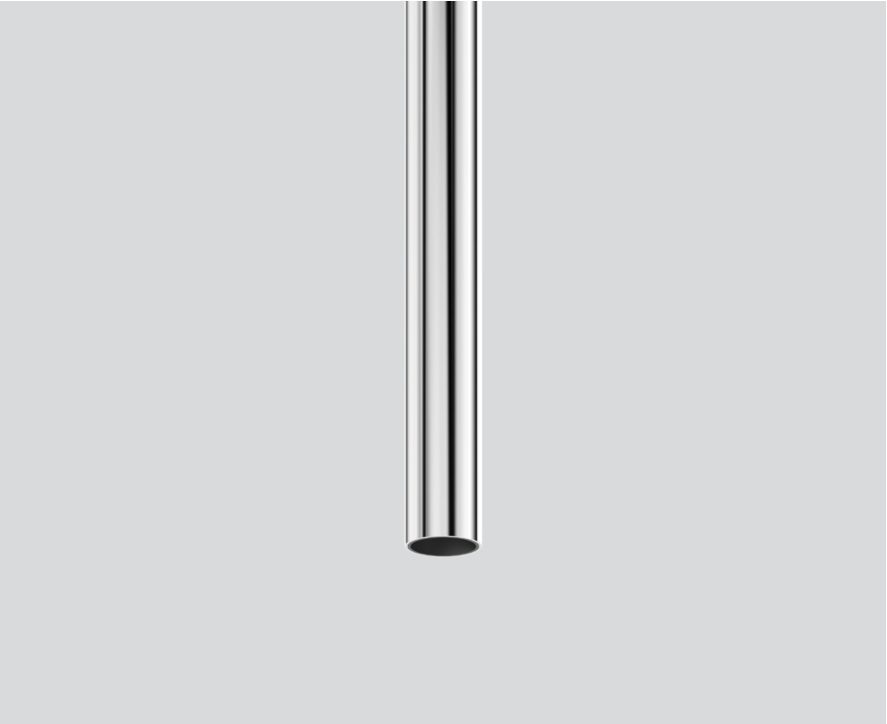

### General

Ceiling , Track Suspended \_\_\_\_\_

chrome \_\_\_\_\_

IP20 \_\_\_\_\_

330 lm \_\_\_\_\_

optical inset 64 lm/W<sup>1</sup> \_\_\_\_\_

### LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88 \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

### Optical

medium \_\_\_\_\_

beam angle 26° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

### Electrical

DALI-2 \_\_\_\_\_

48 V \_\_\_\_\_

fixture 5.7 W \_\_\_\_\_

optical inset 5.1 W \_\_\_\_\_

PC3 \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

### Physical

diameter 22 mm \_\_\_\_\_


height 300 mm \_\_\_\_\_

0.28 kg \_\_\_\_\_

1500 mm \_\_\_\_\_

<sup>1</sup> incl. consideration of optical losses  
<sup>2</sup> Value of containing product at full load (undimmed)


### Light distribution



medium 26°

h (m)	E0° (lx)	ø (m)
1	1600	0.46
2	400	0.92
3	180	1.37
4	100	1.83
5	60	2.29

### Product drawing



### Lighting calculator



# TILA 22 suspended

MOVE IT 10  
030-6640534M



Project / Type

Notes

Count / Date

## Mounting accessories

### HOOK

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	16	030-1000017
jet black	16	030-1000018



## Optical accessories

### HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	20	007-1965118

