




Project / Type


Notes

Count / Date

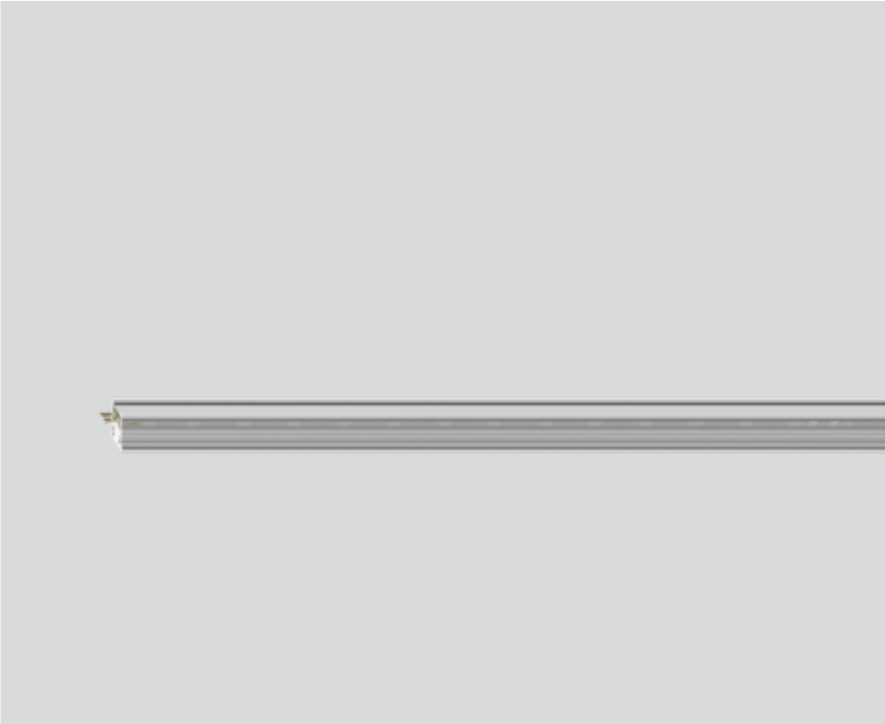


Linear light inset made of plastic; light inset can be installed and moved without tools by means of clip mount; flush with profile system; power supplied via MOVE IT system track profile; rear supply by means of Feeder; hot plug protection; fitted with single LED light points; with indirect light component for additional accentuation of the ceiling or wall; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3; 48 V; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

Light distribution



Product drawing



General

Ceiling / Wall | Track

IP20

1080 lm

optical inset 98 lm/W <sup>1</sup>

LED

2700 K

CRI  $\geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 101 | R<sub>r</sub>: 90 | R<sub>{f(1-5)}</sub>: 88

MR 0.51 | MDER 0.46

Optical

medium

P<sub>stLM</sub>  $\leq 1.0$  <sup>2</sup> | SVM  $\leq 0.4$  <sup>2</sup>

Electrical

DALI-2 | 1 DALI Addr.

PC3 | 48 V

fixture 15.8 W

optical inset 11.1 W

Physical

length 1000 mm | width 11 mm | height 10 mm

0.1 kg

<sup>1</sup> incl. consideration of optical losses  
<sup>2</sup> Value of containing product at full load (undimmed)

Installation instructions

