

# MOVE IT 10 track

trimless


030-1117038



Project / Type

Notes

Count / Date

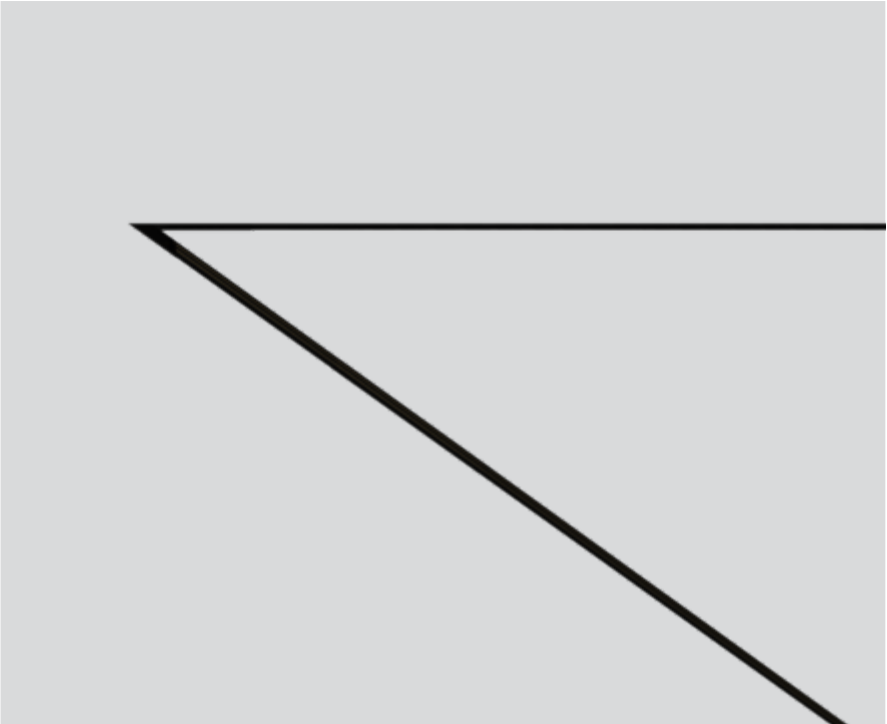

### General

Ceiling , Recessed

jet black , RAL 9005 <sup>1</sup>

IP20

### Electrical

DALI-2

48 V

PC3

### Physical

length 3100 mm

width 75 mm

height 16 mm

2.02 kg

### Cutout

length 3104 mm


width 36 mm

recessed depth 50 mm

<sup>1</sup> RAL code

Thin extruded aluminium profile with 16 mm height and 10 mm width groove; for trimless installation in plasterboard ceilings; suitable for wall or ceiling mounting; suitable for ceiling thickness of 12.5 mm; profile with processing protection against penetration of filler; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised jet black; light insets can be installed and moved without tools by means of clip mount; degree of protection IP20; PC3; 48 V; accessories are listed separately;

### Product drawing



### Installation instructions



[‘030-1117038’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)