

VITA standard rail

wall system


099-9951616 099-9326037A



Project / Type


Notes

Count / Date


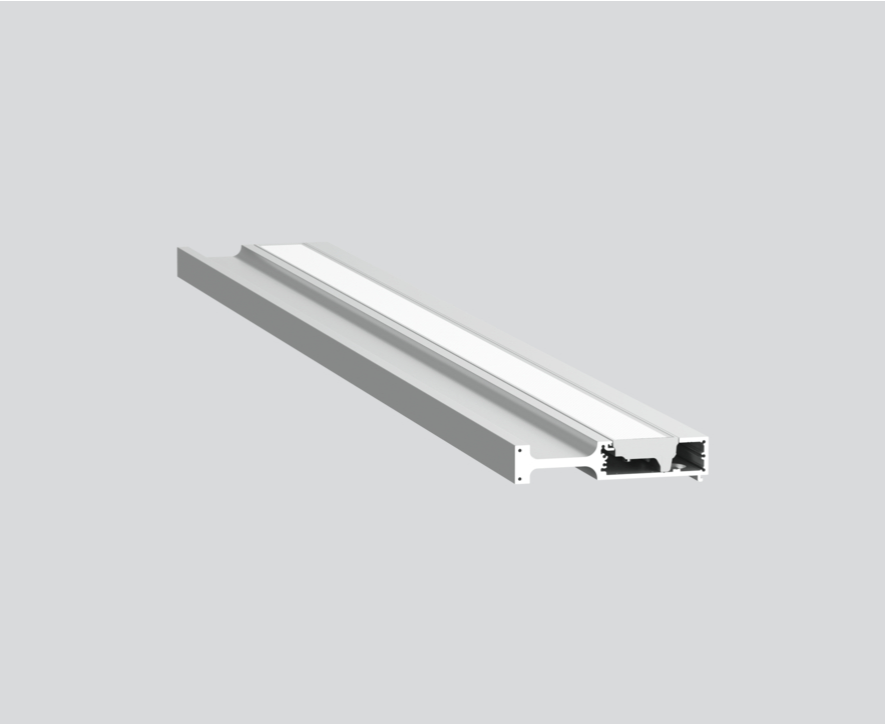


Luminaire housing made of extruded aluminium profile; angular design; no visible screws; for lighting systems; surface anodised aluminium; suitable for wall mounting; luminaire housing incl. medical standard device rail; equipped with one light inset made of aluminium; surface white powder coated; indirect illumination characteristic; lighting module with specially computed, asymmetrical high gloss reflector, linear prismatic cover incl. foil; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; with 2 plug-in terminals for through wiring; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Wall | Surface

anodised aluminium

white

IP20

7160 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_f: 91 | R_{f(1-15)}: 89

MR 0.61 | MDER 0.55

Optical

Linear Prismatic | asymmetric

PstLM ≤ 1.0 ¹ | SVM ≤ 0.4 ¹

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 65 W

system 110 lm/W ²

Physical

length 1007 mm | width 130 mm | height 25 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

