

# MOVE IN 45 square

trim


063-8421414V 063-8842117 002-90726



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

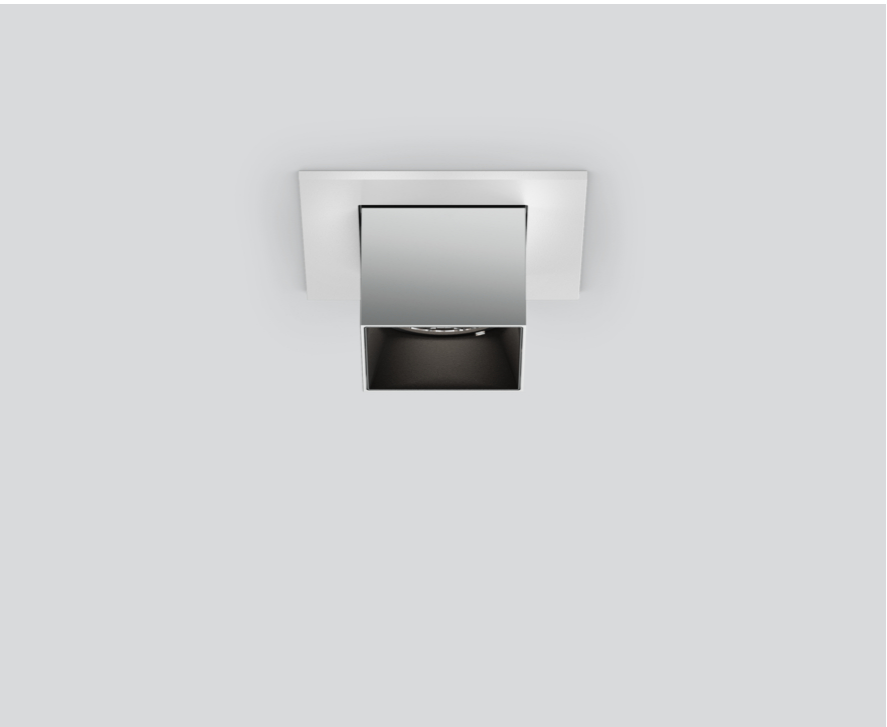

Square spotlight element in aluminium; surface chrome; installation without tools in mounting set due to patented ball catch system; recessed light with trim traffic white; suitable for ceiling thickness of 2-25 mm; spotlight element height adjustable without tools: flush with the ceiling, or extended 25 mm or 35 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 8° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; converter wired secondary side; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



super spot 8°

h (m)	EO° (lx)	ø (m)
1	14200	0.14
2	3500	0.28
3	1600	0.41
4	900	0.55
5	600	0.69

## Product drawing



## General

Ceiling | Semi-Recessed \_\_\_\_\_

chrome \_\_\_\_\_

Mounting set traffic white \_\_\_\_\_

IP20 \_\_\_\_\_

406 lm \_\_\_\_\_

fixture 59 lm/W <sup>1</sup> \_\_\_\_\_

## LED

2700 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 99 | R<sub>f</sub>: 91 | R<sub>(1-15)</sub>: 89 \_\_\_\_\_

MR 0.54 | MDER 0.49 \_\_\_\_\_

## Optical

super spot | beam angle 8° \_\_\_\_\_

PstLM  $\leq 1.0$  <sup>2</sup> | SVM  $\leq 0.4$  <sup>2</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

PC2 | 220-240 V \_\_\_\_\_

system 9.2 W | fixture 6.9 W \_\_\_\_\_

11 Vf | 600 mA \_\_\_\_\_

## Physical

trim \_\_\_\_\_

diameter 78 mm | height 105 mm \_\_\_\_\_

0.49 kg \_\_\_\_\_

## Cutout

diameter 70 mm \_\_\_\_\_

min. ceiling thickness 2 mm | max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 180 mm \_\_\_\_\_

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

