

MOVE IN 45 flex round

trimless

063-8221416V 063-8812117 002-90726



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Semi-Recessed
tilt max 90°
rotation 360°
brushed aluminium
IP20
406 lm
fixture 59 lm/W ¹

LED
2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _r : 91 , R _{t(1-15)} : 89
MR 0.54
MDER 0.49

Optical
super spot
beam angle 8°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrical
non DIM
220-240 V
system 9.2 W
fixture 6.9 W
11 Vf
600 mA
PC2

Physical
trimless
diameter 75 mm
height 106 mm
0.52 kg

Cutout
diameter 65 mm
min. ceiling thickness 9 mm
max. ceiling thickness 25 mm
recessed depth 200 mm


¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Light distribution



super spot 8°		
h (m)	E0° (lx)	ø (m)
1	14200	0.14
2	3500	0.28
3	1600	0.41
4	900	0.55
5	600	0.69

Product drawing

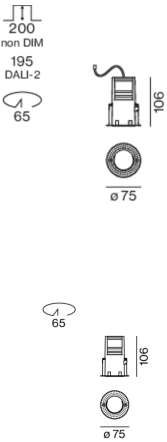

Installation instructions

Lighting calculator