

MOVE IN 45 flex round

trimless

063-8221416S 063-8812117 002-90722



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

brushed aluminium

IP20

1040 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optical

spot

beam angle 12°

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

non DIM

220-240 V

system 15.0 W

fixture 12.7 W

fixture 81 lm/W²

37 Vf

350 mA

PC2

Physical

trimless

diameter 75 mm

height 106 mm

0.69 kg

Cutout

diameter 65 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 200 mm

¹ Value of containing product at full load (undimmed)


² incl. consideration of optical losses & internal control unit losses

Light distribution



spot 12°		
h (m)	E0° (lx)	ø (m)
1	13200	0.21
2	3300	0.42
3	1500	0.63
4	800	0.84
5	500	1.06

Product drawing

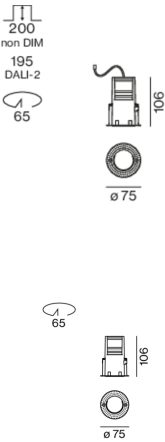

Installation instructions



Lighting calculator

