

# FLEXTRACK


MOVE IT 25 S  
050-751503X



Project / Type

Notes

Count / Date

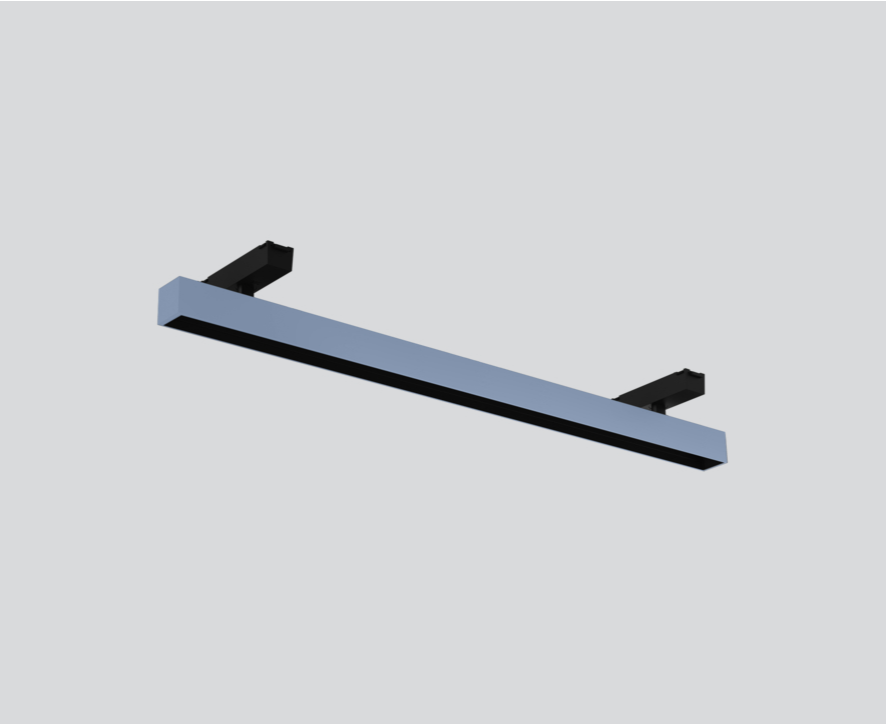

General

Ceiling / Wall , Track

rotation 360°

special colours

Inner colour black

IP20

LED

3000 K

Electrical

DALI-2

48 V

PC3

Physical

length 1510 mm


width 31 mm

height 31 mm

1.3 kg

Thin extruded aluminium profile with 31mm height and 28mm width groove; surface special colours powder coated; Inner colour anodised black; with integrated power track profile for take off of supply voltage and DALI signal; for installation in two MOVE IT 25 S profiles; profile can be installed and moved without tools by means of magnetic holders+locking; mount 360° rotatable and freely slidable on one end; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3; 48 V;

## Product drawing



## Installation instructions

