

# FLEXTRACK


MOVE IT 25 S  
050-751503P



Project / Type

Notes

Count / Date

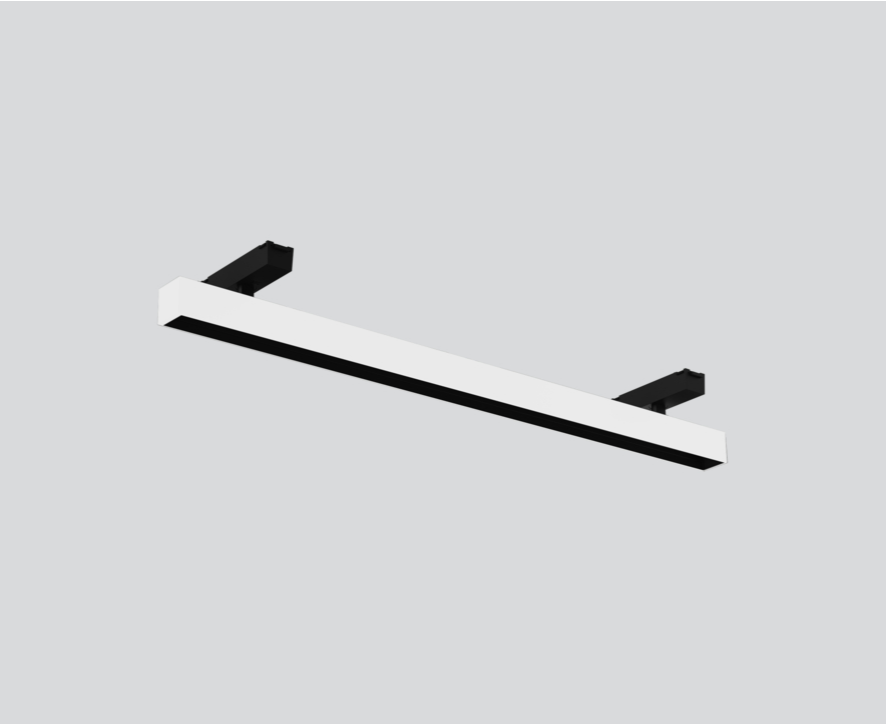

General

Ceiling / Wall | Track

rotation 360°

white | RAL 9016 <sup>1</sup>

Inner colour black

IP20

LED

3000 K

Electrical

DALI-2

PC3 | 48 V

Physical


length 1510 mm | width 31 mm | height 31 mm

1.3 kg

<sup>1</sup> RAL code

Thin extruded aluminium profile with 31mm height and 28mm width groove; surface white powder coated; Inner colour anodised black; with integrated power track profile for take off of supply voltage and DALI signal; for installation in two MOVE IT 25 S profiles; profile can be installed and moved without tools by means of magnetic holders+locking; mount 360° rotatable and freely slidable on one end; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3; 48 V;

## Product drawing



## Installation instructions



[“050-751503P”] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)