

SQUADRO double-sided wallwasher

track
149-2220018B



Project / Type


Notes

Count / Date




Tracked spotlight in die cast aluminium with 2x2-lamp design; surface black powder coated; converter integrated into spotlight head; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; Aisle spotlight 1x shelf / 1x wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable $+20^\circ$ to -10°); 350° rotatable; degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2; 220-240 V; incl. converter, non dimmable; adapter for toolless insertion or movement on a variety of 3-phase power tracks; including attachment for linear alignment of the spotlights; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

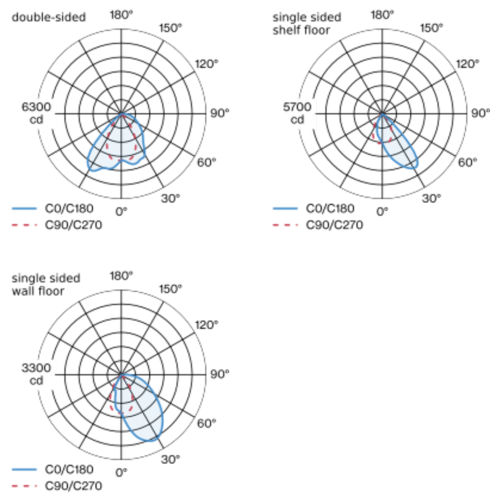

Product drawing



General

Ceiling | Track

tilt min -10°

tilt max 20°

rotation 350°

black | RAL 9005 ¹

IP20

4910², 4920³, 9830⁴ lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 | R_r: 91 | R_{t(1-15)}: 93

MR 0.54 | MDER 0.49

Optical

shelf / wall floor washer

PstLM ≤ 1.0 ³ 2 4 5 | SVM ≤ 0.4 ³ 2 4 5

Electrical

non DIM

PC2 | 220-240 V

system 72²-36³ W

system 136², 137³, 137⁴ lm/W ⁶

Physical

length 140 mm | width 150 mm | height 76 mm

1.18 kg

¹ RAL code ² single sided shelf floor ³ single sided wall floor
⁴ double-sided
⁵ Value of containing product at full load (undimmed)
⁶ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

