

## 030-6640539M



Project / Type

## Notes

Count / Date



Ceiling | Track Suspended

rose gold

IP20

330 lm

optical inset 64 lm/W<sup>-1</sup>

## 3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam

R<sub>g</sub>: 100 | R<sub>f</sub>: 91 | R<sub>{1-15}</sub>: 89

MR 0.59 | MDER 0.53

## medium | beam angle 26°

$$\text{PstLM} \leq 1.0^2 \mid \text{SVM} \leq 0.4^2$$

## DALI-2 | 1 DALI Addr.

PC3 | 48 V

fixture 5.7 W

optical inset 5.1 W

diameter 22 mm | height 300 mm


1500 mm

<sup>1</sup> incl. consideration of optical losses<sup>2</sup> Value of containing product at full load (undimmed)

## medium 26°

h (m)	E0° (lx)	ø (m)
1	1600	0.46
2	400	0.92
3	180	1.37
4	100	1.83
5	60	2.29

## Product drawing



## Lighting calculator



# TILA 22 suspended

MOVE IT 10  
030-6640539M



Project / Type

Notes

Count / Date

## Mounting accessories

### HOOK surface

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	16	030-1000017
jet black	16	030-1000018




## Optical accessories

### HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	20	007-1965118



## Colour rendering

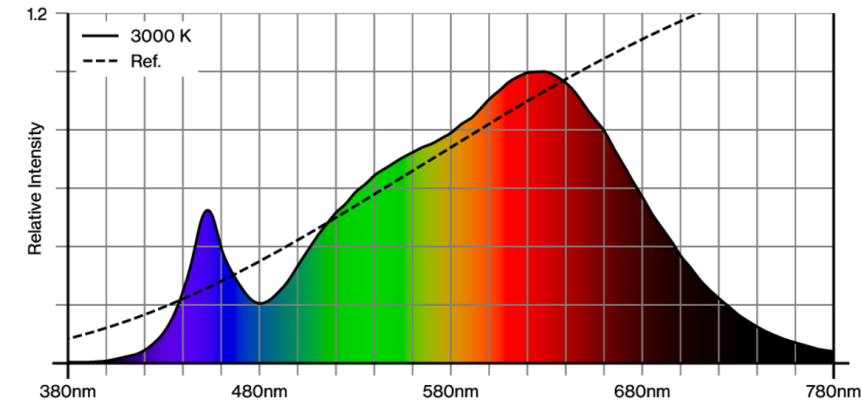

# TILA 22 suspended

MOVE IT 10  
030-6640539M




Project / Type


Notes

Count / Date

CRI/R<sub>a</sub> ≥ 92 R<sub>e</sub> ≥ 89 (3000 K)

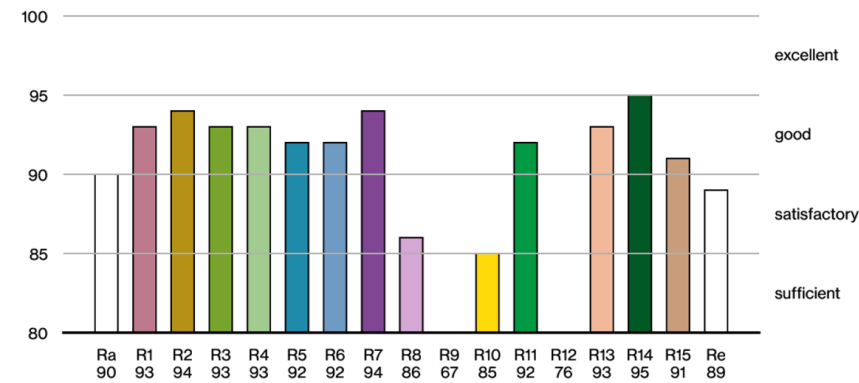

## TM30 colour vector graphic

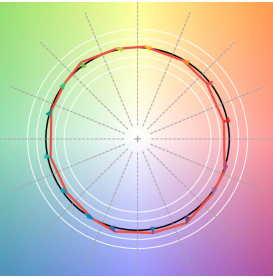

The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.