

MINO 40 reflector

ceiling / suspended system


042-0112137R 042-100201X



Project / Type

Notes

Count / Date

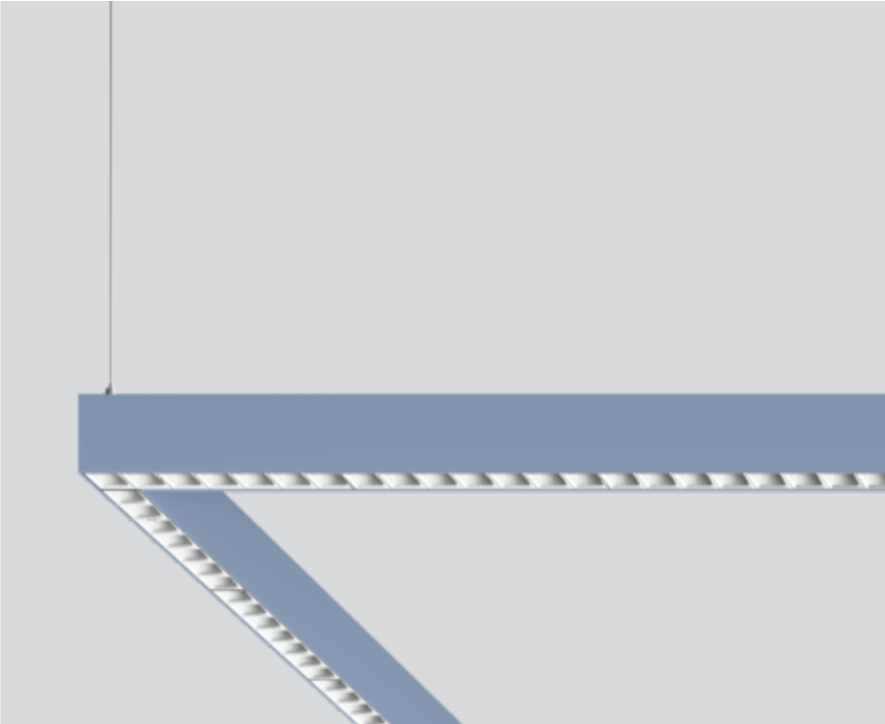

General

Ceiling , Suspended

special colours

Reflector chrome

IP20

3270 lm

3270 lm/m

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 90

MR 0.81

MDER 0.74

Optical

Reflector

symmetric

UGR ≤ 19 , ≥65° <1500 cd/m²

P_{stLM} ≤ 1.0¹

SVM ≤ 0.4¹

Electrical

DALI-2

220-240 V

system 24.4 W

system 134 lm/W²

PC1

1 DALI Addr.

24 W/m

Physical

length 1000 mm


width 40 mm

height 65 mm

¹ Value of containing product at full load (undimmed)

² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions

