

SQUADRO double-sided wallwasher


track
149-2220218S



Project / Type

Notes

Count / Date



General
Ceiling Track
tilt min -10°
tilt max 20°
rotation 350°
jet black RAL 9005
IP20
9940 lm

LED
3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 R _r : 92 R _{t(1-15)} : 93
MR 0.61 MDER 0.55


Optical
shelf floor washer
PstLM ≤ 1.0 ^{1 2 3} SVM ≤ 0.4 ^{1 2 3}

Electrical
non DIM
PC2 220-240 V
system 72 W
system 138 lm/W ⁴


Physical
length 140 mm width 150 mm height 76 mm

Tracked spotlight in die cast aluminium with 2x2-lamp design; surface jet black powder coated; converter integrated into spotlight head; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; aisle spotlight shelf floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable +20° to -10°); 350° rotatable; degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2; 220-240 V; incl. converter, non dimmable; adapter for toolless insertion or movement on a variety of 3-phase power tracks; including attachment for linear alignment of the spotlights; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ double-sided ² single-sided
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



SQUADRO double-sided wallwasher

track
149-2220218S



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.977	0.94	0.905	0.871	0.838
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	33
B13	43
B16	53
B20	67
C10	53
C13	69
C16	85
C20	107


Optical accessories

IP40 PROTECTION GLASS


TYPE	ARTICLE NUMBER(S)
2 x 2 lamps / double-sided	049-2920010



Colour rendering

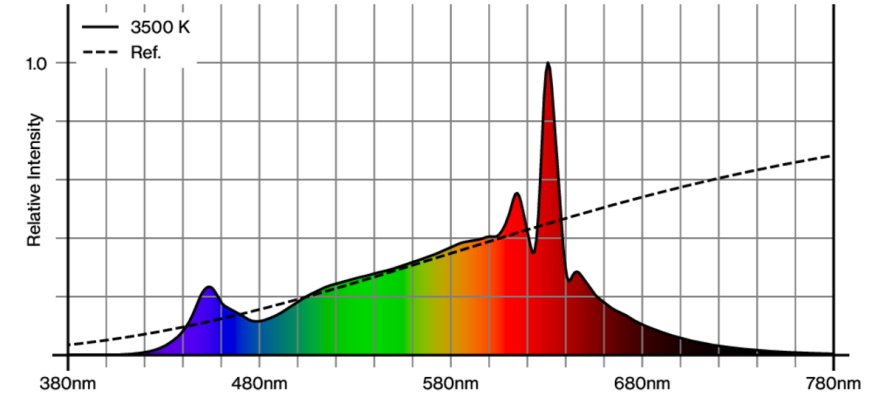

CRI/R_a ≥ 95 R_e ≥ 93 (3500 K)

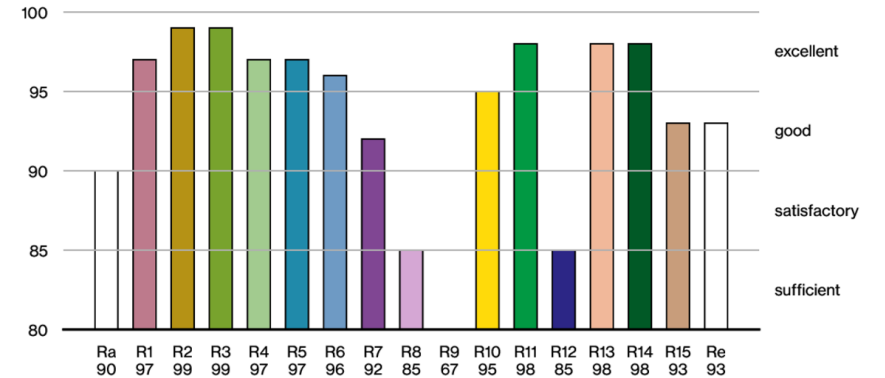

SQUADRO double-sided wallwasher

track
149-2220218S




Project / Type

Notes

Count / Date

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.