

# BO 45 base surface 2 lamps


049-6430718S



Project / Type

Notes

Count / Date

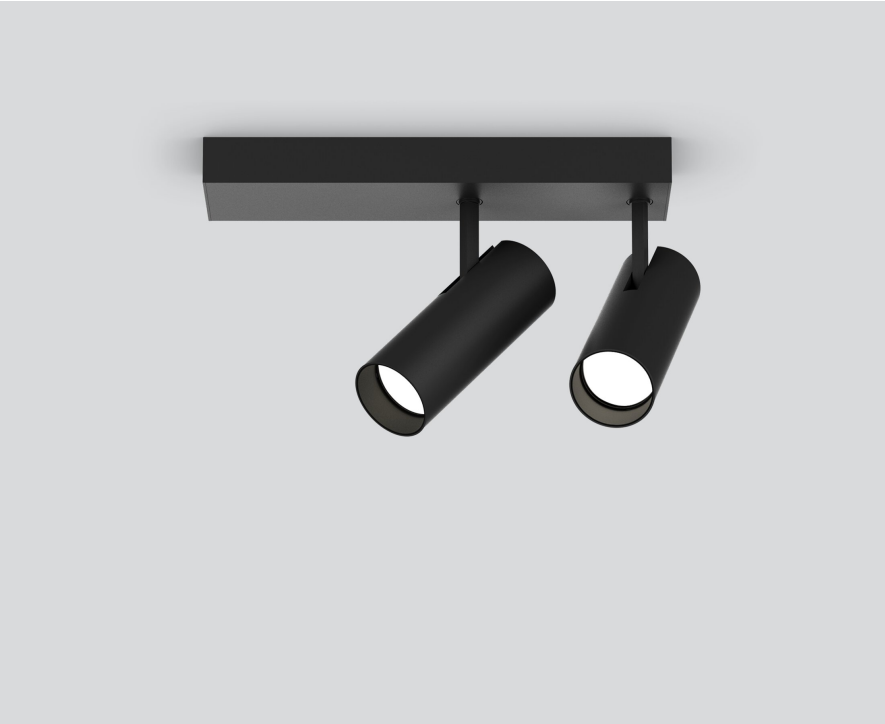

Surface mounted spotlight made of aluminium; 2 lamps; cylindrical spotlight heads; surface jet black powder coated; 330° rotatable and 90° tiltable; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 12° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC1; 220-240 V; incl. converter, non dimmable; luminaire for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



### General

Ceiling | Surface

tilt max 90°

rotation 330°

jet black | RAL 9005

IP20

2400 lm

### LED

3500 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 99 | R<sub>f</sub>: 90 | R<sub>t(1-15)</sub>: 89

MR 0.7 | MDER 0.64

### Optical

spot | beam angle 12°

### Electrical

non DIM

PC1 | 220-240 V

system 29.9 W

system 80 lm/W <sup>1</sup>


### Physical

length 245 mm | width 55 mm | height 164 mm

0.7 kg

<sup>1</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency


### Light distribution



spot 12°

h (m)	EO° (lx)	ø (m)
1	15200	0.21
2	3800	0.42
3	1700	0.63
4	900	0.84
5	600	1.06

### Product drawing



### Installation instructions



### Lighting calculator

