

# TWIST 100

trim


048-1121118S 048-2796317 002-90780



Project / Type


Notes

Count / Date

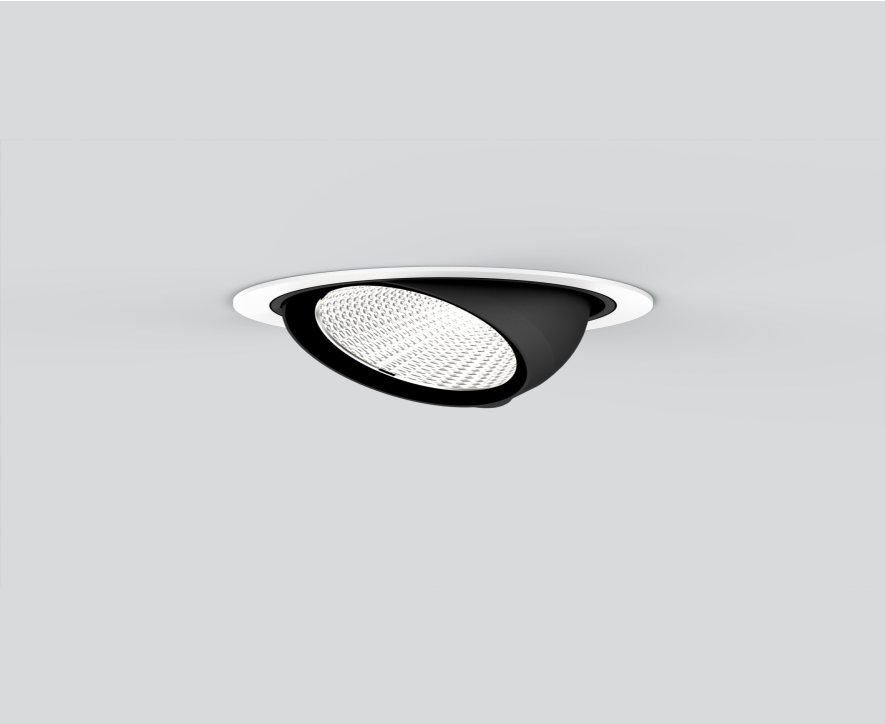


Round recessed spotlight in die-cast aluminium; 1 lamp; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim traffic white; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 20° beam; optical attachments available as accessories; optical attachments can be combined; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



| h (m) | EO° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 17500    | 0.34  |
| 2     | 4400     | 0.69  |
| 3     | 1900     | 1.03  |
| 4     | 1100     | 1.38  |
| 5     | 700      | 1.72  |

## Product drawing



### General

Ceiling | Recessed

tilt max 45°

rotation 360°

black | RAL 9005 <sup>1</sup>

Mounting set traffic white

front IP20 | back IP20

3140 lm

fixture 138 lm/W <sup>2</sup>

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 100 | R<sub>f</sub>: 92 | R<sub>{1-15}</sub>: 92

MR 0.78 | MDER 0.71

### Optical

spot | beam angle 20°

PstLM ≤ 1.0 <sup>3</sup> | SVM ≤ 0.4 <sup>3</sup>

### Electrical

non DIM

PC2 | 220-240 V

system 25.3 W | fixture 22.7 W

650 mA

### Physical

diameter 118 mm | height 99 mm

0.46 kg

### Cutout

diameter 108 mm

min. ceiling thickness 2 mm | max. ceiling thickness 25 mm

recessed depth 160 mm

<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

