

LENS WIDE

MOVE IT PRO


086-6750530W



Project / Type _____

Notes _____

Count / Date _____

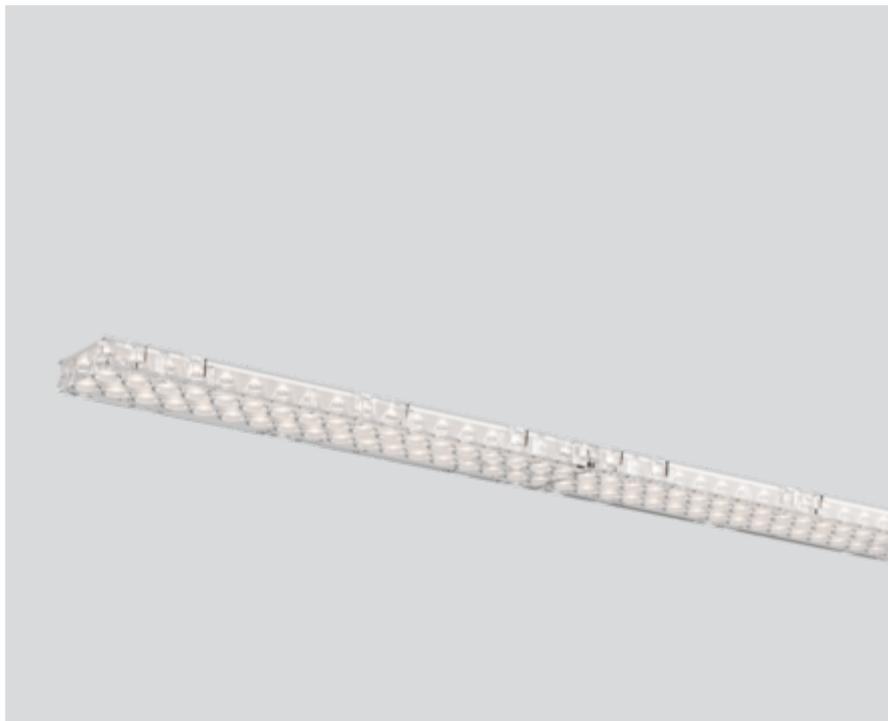

General

Ceiling , Track _____

lens inset _____

white _____

IP20 _____

7720 lm _____

2570 lm/m _____

LED

3000 K _____

CRI \geq 80 _____

L90 / 50000 h _____

initial MacAdam \leq 3 SDCM _____

MR 0.56 _____

MDER 0.51 _____

Optical

wide flood _____

UGR \leq 19 , \geq 65° <3000 cd/m² _____

PstLM \leq 1.0 ¹ _____

SVM \leq 0.4 ¹ _____

Electrical

DALI-2 _____

220-240 V _____

system 46 W _____

system 168 lm/W² _____

PC2 _____

1 DALI Addr. _____

15 W/m _____

Physical

length 3000 mm _____

width 43 mm _____


height 13 mm _____

¹ Value of containing product at full load (undimmed)

² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; power supplied via MOVE IT PRO system track profile; equipped with specially computed wide beam lenses; precise radiation characteristic with symmetrical light distribution; for use in schools and offices; UGR \leq 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 3000 cd/m²; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator

