

SPOTLINE


MOVE IT PRO 45
086-6330637W



Project / Type


Notes

Count / Date

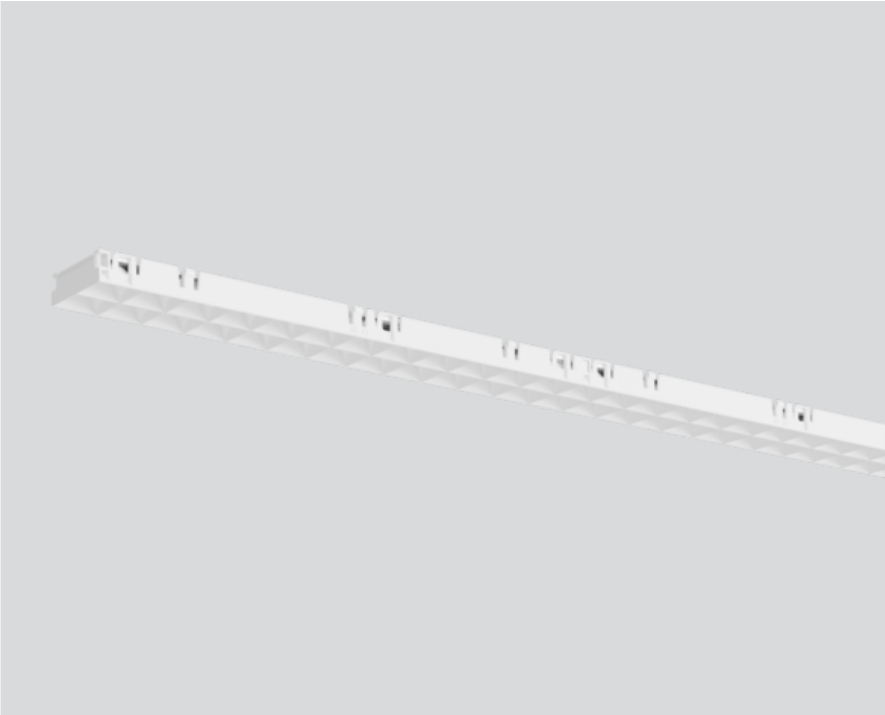

Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; for linear tracks; power supplied via MOVE IT PRO 45 system track profile; surface traffic white; fitted with single LED light points; good glare control through recessed light point level; inserted lenses with wide flood radiation characteristic; for use in schools, retail and offices; UGR ≤ 16 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; light colour 4000 K; $\leq 3 \text{ SDCM}$ (initial MacAdam); CRI ≥ 80 ; min. 90% of luminous flux after 100000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling | Track

spot line inset

traffic white | RAL 9016

IP20

5730 lm

2870 lm/m

LED

4000 K

CRI ≥ 80

L90 / 100000 h

$\leq 3 \text{ SDCM}$ (initial MacAdam)

MR 0.72 | MDER 0.65

Optical

wide flood

UGR ≤ 16 | $\geq 65^\circ < 1500 \text{ cd/m}^2$

PstLM ≤ 1.0 ¹ | SVM ≤ 0.4 ¹

Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 34 W

system 169 lm/W²

17 W/m

Physical

length 2000 mm | width 43 mm | height 13 mm

0.88 kg

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

