

# ARY cable suspended 3 lamps


MOVE IT PRO  
086-73209388M



Project / Type


Notes

Count / Date

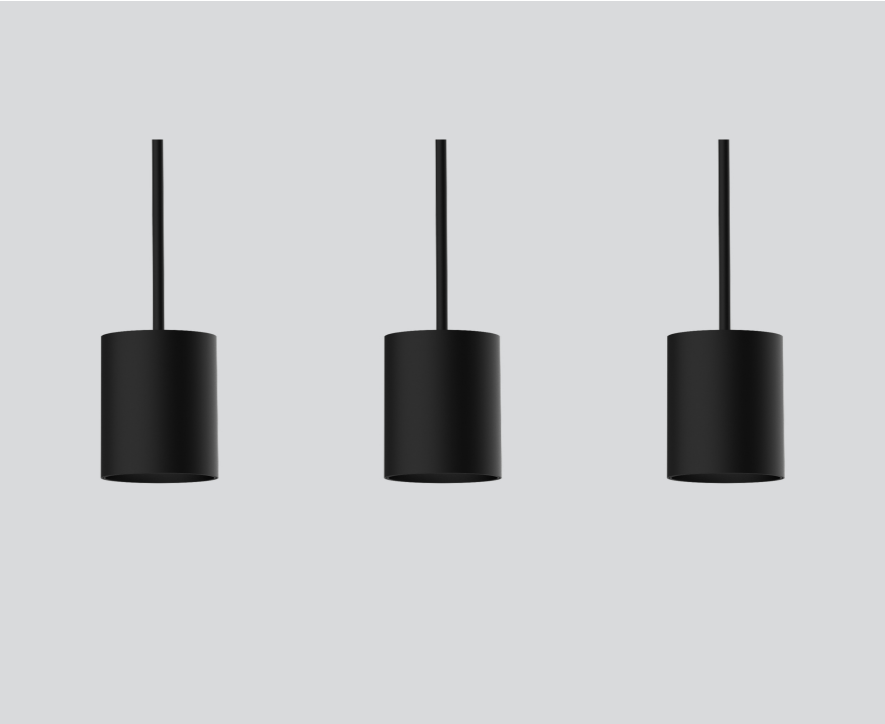

Decorative pendant light inset made of aluminium; 3 lamps; cylindrical spotlight heads; surface black powder coated; light inset, incl. high power adapter + converter can be installed flexibly and without tools; power supplied via MOVE IT PRO system track profile; pendant fitting with 2000mm suspension, incl. feed (black), can be individually shortened; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 25° beam; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



medium 25°      combined

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 12600    | 0.44  |
| 2     | 3200     | 0.89  |
| 3     | 1400     | 1.33  |
| 4     | 800      | 1.78  |
| 5     | 500      | 2.22  |

## Product drawing



## General

Ceiling | Track Suspended

black | RAL 9005 <sup>1</sup>

Converter Jet Black

IP20

2920 lm

## LED

2700 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 96 | R<sub>f</sub>: 90 | R<sub>t(1-15)</sub>: 88

MR 0.55 | MDER 0.5

## Optical

medium | beam angle 25°

PstLM  $\leq 1.0^2$  <sup>3</sup> | SVM  $\leq 0.4^2$  <sup>3</sup>

## Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 41 W

system 71 lm/W <sup>4</sup>

## Physical

cable 2000 mm

diameter 47 mm | height 110 mm

adapter 402 mm

<sup>1</sup> RAL code <sup>2</sup> combined  
<sup>3</sup> Value of containing product at full load (undimmed)  
<sup>4</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# ARY cable suspended 3 lamps

MOVE IT PRO  
086-73209388M



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000  | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF               | 0.97                         | 0.93   | 0.9   | 0.86   | 0.82   |
| LSF                | 1                            | 1      | 1   | 1      | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> Room Surface Maintenance Factor |        |        |
| MF                 | Maintenance Factor           |        | LLMF Lamp Lumens Maintenance Factor               |        |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF Lamp Survival Factor                          |        |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 17                 |
| B13                            | 22                 |
| B16                            | 28                 |
| C10                            | 22                 |
| C13                            | 27                 |
| C16                            | 35                 |

## Mounting accessories

### RING CEILING MOUNTED

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50     | 050-0510217       |
| jet black     | 50     | 050-0510218       |



### HOOK

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 18     | 050-0510317       |
| jet black     | 18     | 050-0510318       |

