

# ARY cable suspended 2 lamps

MOVE IT PRO  
086-73101387F



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_




Decorative pendant light inset made of aluminium; 2 lamps; cylindrical spotlight heads; surface black powder coated; light inset, incl. high power adapter + converter can be installed flexibly and without tools; power supplied via MOVE IT PRO system track profile; pendant fitting with 2000mm suspension, incl. feed (black), can be individually shortened; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

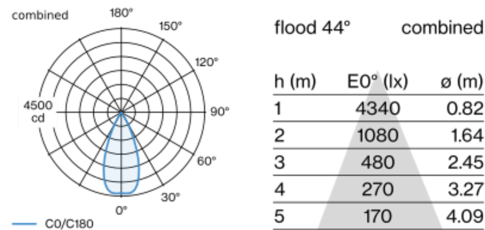

## Product drawing



## General

Ceiling | Track Suspended  
black | RAL 9005 <sup>1</sup>  
Converter Traffic White  
IP20  
2340 lm

## LED

4000 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 3$  SDCM  
R<sub>g</sub>: 96 | R<sub>f</sub>: 89 | R<sub>f[1-15]</sub>: 89  
MR 0.84 | MDER 0.76

## Optical

flood | beam angle 44°  
PstLM  $\leq 1.0^2$  3 4 5 6 | SVM  $\leq 0.4^2$  3 4 5 6

## Electrical

DALI-2 | 1 DALI Addr.  
PC2 | 220-240 V  
system 28.2 W  
system 83 lm/W <sup>7</sup>

## Physical

cable 2000 mm  
diameter 47 mm | height 110 mm  
adapter 402 mm

<sup>1</sup> RAL code <sup>2</sup> combined <sup>3</sup> soft lens BO 45 007-1965980  
<sup>4</sup> wallwasher lens BO 45 007-1965780  
<sup>5</sup> oval lens BO 45 007-1965880  
<sup>6</sup> Value of containing product at full load (undimmed)  
<sup>7</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

