

FRAME 60 high lumen

trim system

007-93M8037 006-16232H 035-02537



Project / Type


Notes

Count / Date



Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; for continuous lighting systems; suitable for ceiling thickness of 8-25 mm; surface traffic white powder coated; luminaire profile for mounting available in advance; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling | Recessed

traffic white | RAL 9016

IP20

4770 lm

2030 lm/m

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_f: 91 | R_{h-15}: 89

MR 0.61 | MDER 0.55

Optical

High Performance Opal | opal (lambertsch)

PstLM ≤ 1.0 ¹ | SVM ≤ 0.4 ¹

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 45 W

system 106 lm/W ²

19 W/m

Physical

trim

length 2344 mm | width 77 mm | height 78 mm

5.3 kg

Cutout

length 2360 mm | width 66 mm

min. ceiling thickness 8 mm | max. ceiling thickness 25 mm

recessed depth 108 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



FRAME 60 high lumen

trim system

007-93M8037 006-16232H 035-02537



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.92 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Factor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 7 |
| B13 | 10 |
| B16 | 12 |
| B20 | 14 |
| C10 | 10 |
| C13 | 20 |
| C16 | 24 |
| C20 | 28 |

Components



LIGHT OPTIC COVER

| TYPE | ARTICLE NUMBER(S) |
|-----------------------|-------------------|
| opal high performance | 006-16232H |



INSTALLATION CHANNEL


| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 2344-77-76 | 035-02537 |



Mounting accessories

END CAPS trimless

| TYPE | COLOUR | ARTICLE NUMBER(S) |
|--------|-----------------|-------------------|
| 1 pair | traffic white | 035-13137 |
| 1 pair | white aluminium | 035-1313G |



FRAME 60 high lumen

trim system

007-93M8037 006-16232H 035-02537



Project / Type

Notes

Count / Date

Mounting accessories


LINEAR CONNECTOR

| | |
|-----------|-------------------|
| TYPE | ARTICLE NUMBER(S) |
| 1 piece | 005-40046 |
| 10 pieces | 005-40046.10 |



OPAL COVER LINEAR CONNECTOR

| |
|-------------------|
| ARTICLE NUMBER(S) |
| 006-14000 |



Mounting accessories

MOUNTING BRACKET recessed trim

| | |
|-----------|-------------------|
| TYPE | ARTICLE NUMBER(S) |
| 1 piece | 035-10200 |
| 25 pieces | 035-10200.25 |




Electrical accessories

THROUGH WIRE

| | |
|-----------|-------------------|
| TYPE | ARTICLE NUMBER(S) |
| 10 pieces | 004-90003 |
| 10 pieces | 004-90005 |



Colour rendering

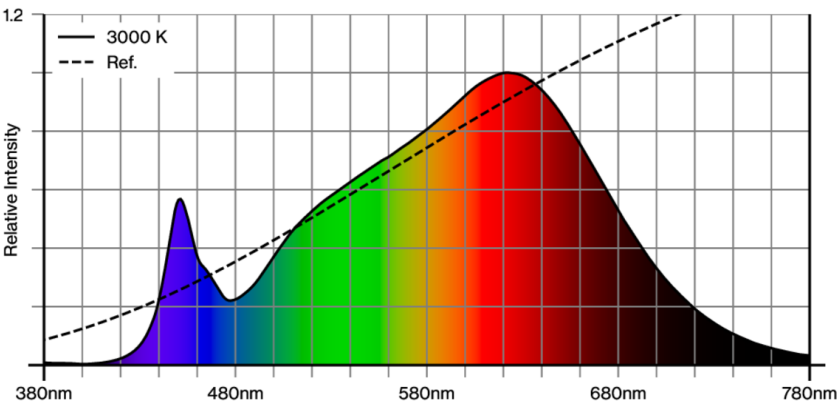

FRAME 60 high lumen

trim system


007-93M8037 006-16232H 035-02537




Project / Type

Notes

Count / Date

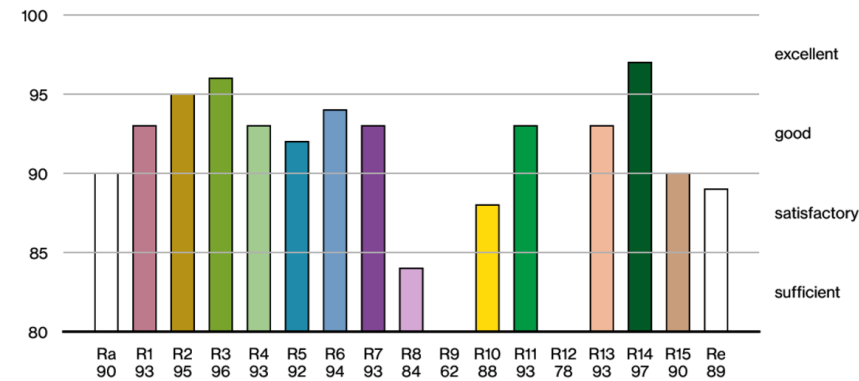

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

