

SETA 60 CONEX

reflector direct / indirect


socket / socket

suspended system

058-4138137R



Project / Type	
Notes	
Count / Date	

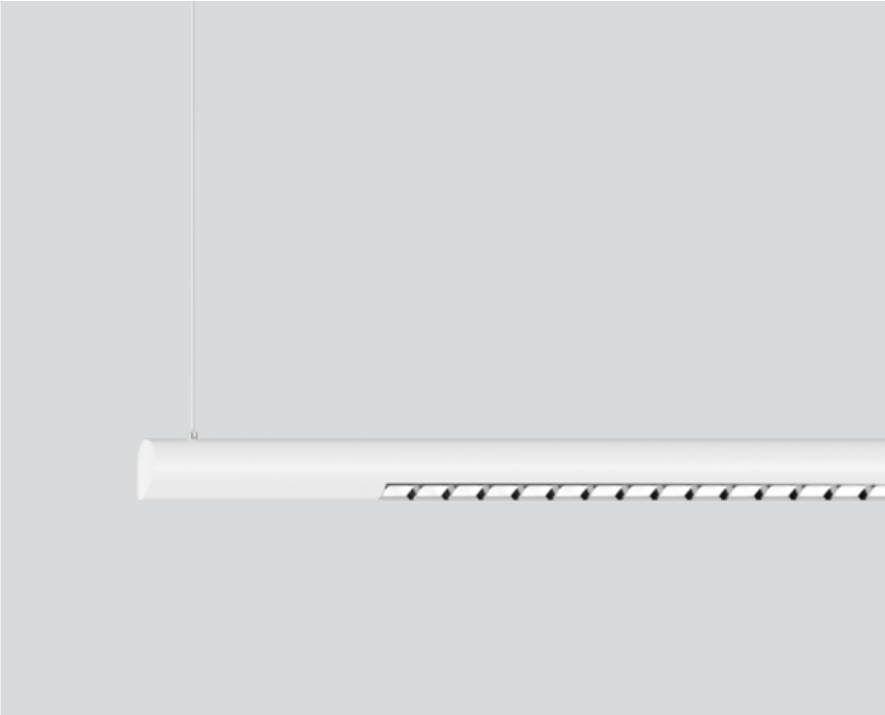

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 60 mm) linear; converter integrated into luminaire housing; for lighting systems; surface pure white powder coated; for suspended mounting (1500 mm cable suspension - oblique or straight - as an accessory); with integrated toolless suspension height adjustment on the luminaire; canopy for through wiring (available as an accessory); electrical connection of the luminaires via plug/socket system; connectors (L-, T- or X-shape) available as an accessory; luminaire connection rotatable around its own axis, which means that any spatial angle can be realized; extruded profile for improved thermal management; high gloss reflector with faceted design; Reflector chrome; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; $UGR \leq 13$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; light colour 4000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Ceiling Suspended
pure white RAL 9010
Reflector chrome
IP20
indirect 6070 lm direct 5750 lm
total 11820 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam $\leq 3 \text{ SDCM}$
$R_g: 99$ $R_f: 92$ $R_{f(1-15)}: 90$
MR 0.81 MDER 0.74

Optical

Reflector symmetric
$UGR \leq 13$ $\geq 65^\circ < 1500 \text{ cd/m}^2$
$PstLM \leq 1.0$ ¹ $SVM \leq 0.4$ ¹

Electrical


DALI-2 2 DALI Addr.
PC1 220-240 V
system 87 W
system 136 lm/W ²
socket / socket

Physical

length 2351 mm width 60 mm height 60 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator

